








## WIRELESS TELEPHONES.

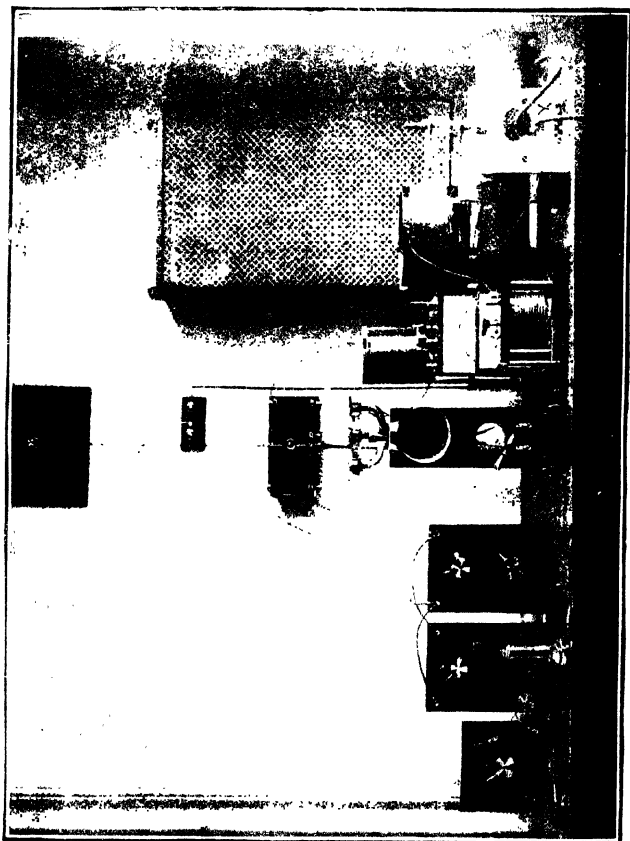

**PORTERSEN WIRELESS TITHROUSE STATION.** On 12th June 1930, at 12.45 p.m., the microphones with aerial were above; on the left the receiver, and on the right the *Transmitter*, by kind permission of the Earl of Salisbury.

Frontispiece

# WIRELESS TELEPHONES

And How They Work

BY

JAMES ERSKINE-MURRAY, D.Sc.,

Fellow of the Royal Society of Edinburgh ; Fellow of the Institute of Physics ,  
Member of the Institution of Electrical Engineers ; Past President  
of the Wireless Society of London ; Fellow of the Institute of  
Radio Engineers, New York ; Member of the Physical  
Society of London ; Author of "Wireless Tele-  
graphy" and Translator of Ruhmer's  
"Wireless Telephony"

Third Edition, Revised and Enlarged



London

CROSBY LOCKWOOD & SON,  
STATIONERS' HALL COURT, LUDGATE HILL, E.C.

1923

THIS LITTLE BOOK  
IS DEDICATED TO  
MY WIFE

PRINTED IN GREAT BRITAIN BY WILLIAM CLOWES AND SONS, LIMITED,  
LONDON AND BECCLES.

## PREFACE

IN the nine short chapters which follow I have attempted to give a well balanced sketch of a subject so complex that it has only been possible to show the leading principles in their proper values by excluding a mass of details of lesser importance.

Much time and thought have been expended in the attempt, but both will have been well spent if some of those to whom wireless telephony is as yet but a name are enabled to realise in some degree the dauntless perseverance of the inventors, the wonderful adjustment of means to ends, and the almost poetic beauty of the inter-linking laws of Nature which together have gone to the establishment of this new means of intercourse.

I shall also be glad if what I have said in Chapter IX. rouses some of my countrymen to a realisation of the enormous value of cheap and rapid communications within the Empire.

Telegraphs and Telephones, of every sort, are the nerves of the body politic; they carry swift messages from the extremities to the brain centres, and transmit instantaneous orders for action from brain to hand. Their failure is paralysis. This Empire is peculiarly liable to such failure owing to the thousands of miles of sea which separate its parts. We must therefore welcome and encourage every new invention, such as wireless telephony, which tends to avert the most serious disease to which our national life is subject.

J. ERSKINE-MURRAY.



# CONTENTS.

	PAGE
CHAPTER I.—HOW WE HEAR ... ..	1
CHAPTER II.—HISTORICAL ... ..	11
CHAPTER III.—THE CONVERSION OF SOUND INTO ELECTRIC WAVES ... ..	17
CHAPTER IV.—WIRELESS TRANSMISSION ... ..	22
CHAPTER V.—THE PRODUCTION OF ALTERNATING CUR- RENTS OF HIGH FREQUENCY... ..	30
CHAPTER VI.—HOW THE ELECTRIC WAVES ARE RADI- ATED AND RECEIVED ... ..	44
CHAPTER VII.—THE RECEIVING INSTRUMENTS ...	52
CHAPTER VIII.—DETECTORS AND AMPLIFIERS ...	61
CHAPTER IX.—ACHIEVEMENTS AND EXPECTATIONS ...	70
GLOSSARY OF TECHNICAL WORDS ... ..	79
INDEX ... ..	83

# WIRELESS TELEPHONES.

## CHAPTER I.

### HOW WE HEAR.

THERE are few more wonderful organs in Nature than the ear. From mere changes of air pressure on its drum it gives us a series of sensations, pleasant or unpleasant, musical or unmusical, and, most remarkable of all, it enables us to distinguish between many simultaneous sounds although these, when they arrive at it, are absolutely fused together as a mere motion of the particles of the air.

From whatever source a sound is produced, whether from the vibration of the vocal chords of a speaker, from the trembling parchment of a drum or the string of a violin, its mode of transmission to the ear is the same.

What passes out from the source is merely a rhythmical series of changes of pressure which spreads in ever widening spheres throughout the atmosphere. These compressions follow one another in an order which is different for every sound.

Thus it has been found that the sound "oo," as in boot, is the sensation produced by a uniform succession of equal changes of pressure following one another at

equal intervals of time, and the sound "ah," by groups of pressure changes, each group containing a large pressure and several smaller ones. In more complex sounds the grouping of the pressures is more complex

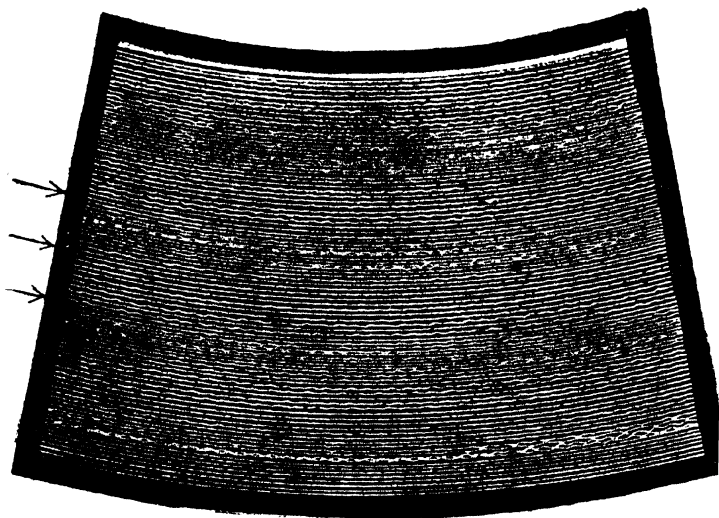


FIG. 1.—Portions of the Record of a powerful bass voice (Oreste Luppi, of Milan) singing *La Calunnia* from *Il Barbiere di Siviglia*. Examine with magnifying glass. Note the different types of wave corresponding to different sounds:—e.g., at A, waves in groups of two; at B, waves which rise steeply and fall slowly; at C, a nearly-uniform series of equal waves.

[From an article by Professor J. G. McKendrick, LL.D., F.R.S., in *Nature*, of 15th April, 1909.]

also, the changes sometimes following one another in an order so apparently confused that there is no way of analysing it but by the ear.

For instance, the sound of a band, as it reaches the

ear, is compounded of all the various types and rates of compression waves given out by the different instruments, but it can be recorded in the form of one, apparently irregular, wavy line on the wax cylinder of a phonograph. The trained ear, however, can distinguish each instrument. It is this fact, and not the electrical questions, which renders telephony so mysterious a means of communication.

Once it is grasped that the physical cause of even the most confused sound—the din of an ironworks, the babel of a market place, or the music of a band—is merely a pulsation of the air, the rest is comparatively simple.

Sound is a picture, painted, not in space and colour, but in time and motion.

It is easy enough to understand that the varying pressure of the air acting on a flexible membrane may cause it to press together, alternately more or less firmly, two pieces of carbon, one of which is attached to the membrane, and that in so doing an electrical current, passing from carbon to carbon, must vary in strength in time with the changes of pressure.

In telephony this simple apparatus is called a microphone, or transmitter. At the other end of the wire the reconversion of the electrical variations into air-pressure variations is equally direct. As the electric current increases or decreases it attracts or releases a springy thin metal disc which, by its motion, compresses or rarifies the air next to it, causing changes of pressure, which are replicas in every characteristic of

the original waves, to spread rapidly outwards, producing in the ear of the listener the sensation of the same sound as was spoken into the transmitter.

To understand how the sound of the voice is transmitted by a telephone one must, therefore, understand the physical nature of the sounds themselves. Now book-knowledge of nature is, alone, most unsatisfactory, so those who wish to know at first hand how things really are should make some trials for themselves.

To see the motion due to a wave of sound, for instance, hang from any convenient support a thin sheet of notepaper or cotton wool by two threads, each a foot or two long, attached to different points of the same edge of the sheet. When it has come to rest, hanging vertically, stand squarely facing it at a yard away, holding upright between your hands a board or cardboard not less than a foot square.

Get some one else to watch the hanging sheet closely and suddenly jerk the board towards you. The sheet jumps in the same direction as if tied to the board by a cord.

What you have observed is the progress of a wave of diminished pressure, or rarefaction, through the air, a sound wave in fact, but not of sufficient suddenness to give the sensation of sound, though it does move the drum of your ear slightly.

As you pulled the board towards you, you made a partial vacuum behind it, the adjacent air fell into the emptier space, and the falling in process travelled out-

wards till it moved the paper towards you, *i.e.*, when the wave reached the paper it reduced the air pressure on the side nearest you, so that the air beyond, which was at higher pressure, pushed the paper in.

If you take a spadeful out of the bottom of a heap of dry sand or gravel, you will see a very similar process occurring, the gap being nearly filled up again by sand falling in from further and further back in the heap. The grains of sand represent the molecules of the air, and their weight the elastic forces which move them. Owing to the mass of each sand grain being much greater than that of a molecule of air, while the force acting on it is less, the motion of the air wave is enormously more rapid than that of the sand.

The wave produced in the way described above is technically called a wave of rarefaction. A wave of compression may be produced by holding the board loosely in one hand and striking it sharply on the back with the closed fist of the other. Both kinds of wave travel at the same speed—about 1,100 feet per second, or taken roughly, 5 seconds to the mile—and an audible musical sound is produced provided the pulsations succeed one another uniformly at any rate between 30 and 30,000 per second.

The former is a very low note, and the latter a very high one. One cannot move the board to and fro with sufficient rapidity, while holding it in the hands, to produce a musical note, but if it be clamped to the back of a chair and struck sharply it will do so if of suitable size and thickness.

Air waves have actually been photographed by Mr. Vernon Boys. Fig. 4 shows a rifle bullet travelling at a speed of about 2,000 feet per second, and the dark lines slanting away on either side of the bullet, like the waves of a ship, are the air compression waves which on reaching the ear give the sensation we know as the

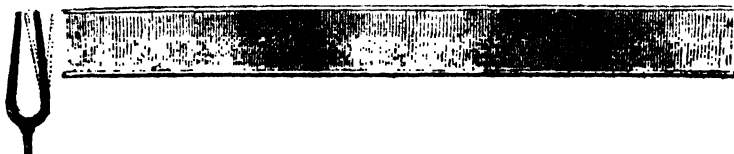


FIG. 2.



FIG. 3.

Two ways of representing Sound Waves. The denser portions where the pressure is high are represented by the crests in the lower diagram.

scream or whistle of the bullet. At the right hand side of the figure the sound waves are seen in advance of the flying particles of powder. This is because the latter are not travelling as fast as 1,100 feet per second, at which speed, or very near it, all compression waves travel in air whatever be their cause. The waves, therefore, run ahead of the particles.

On account of difficulties in drawing, it is usual to represent sound waves as wavy lines, like those representing waves on the surface of water; only the height of the wave represents the pressure, and not trans-

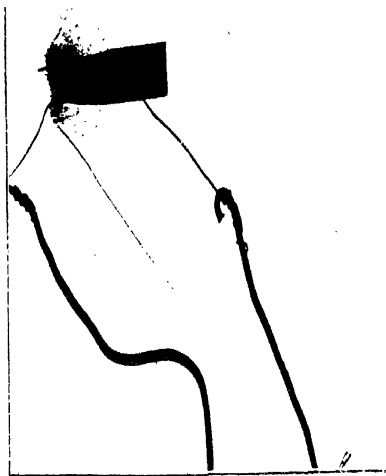


FIG. 4.—AIR PRESSURE WAVES IN PHOTOGRAPH OF FLYING BULLET. [C. V. Boys.] The lines extending on either side from near the front and rear of the bullet are Air Pressure Waves, which constitute the Sound of the whistle or scream of the bullet. The black crooked lines are wires which the bullet strikes, and so completes an electric circuit, causing an electric spark, which takes the photograph instantaneously. The powder at the head of the bullet is broken fragments of one of the wires.

*(To face page 6)*





verse motion. Another method would be to represent the increased pressure by a darker shading, but though this gives a better "picture" it does not make so useful a diagram, since it is easier to measure a simple distance than to judge the depth of a shade.

Figures 2 and 3 show the same waves represented by these different methods. It is obvious that fig. 3 is really more useful than fig. 2, although, apparently, less realistic, for the extra pressure at any point is shown as the distance of the curve from a horizontal straight line, and this, being simply a length, is easy of measurement.

In fig. 2 it is not possible to determine the change of pressure by any such simple method. The latter, however, gives a pictorial representation of the crowding together of the air molecules during the passage of a wave of pressure which renders the process more easily understood.

The loudness of a sound depends on the amount and suddenness of the change of pressure on the drum of the ear, and the note, or pitch, on the number of complete to and fro movements the drum is forced to make per second.

The quality of a sound, *i.e.*, the difference between two different vowels sung or spoken on the same note, or between the tones of a cornet and a violin, depends on the smoothness or jerkiness of the changes of pressure. It is here that the difficulties of telephony of every kind begin, for not only must the variations of the electric current be made to correspond roughly with the

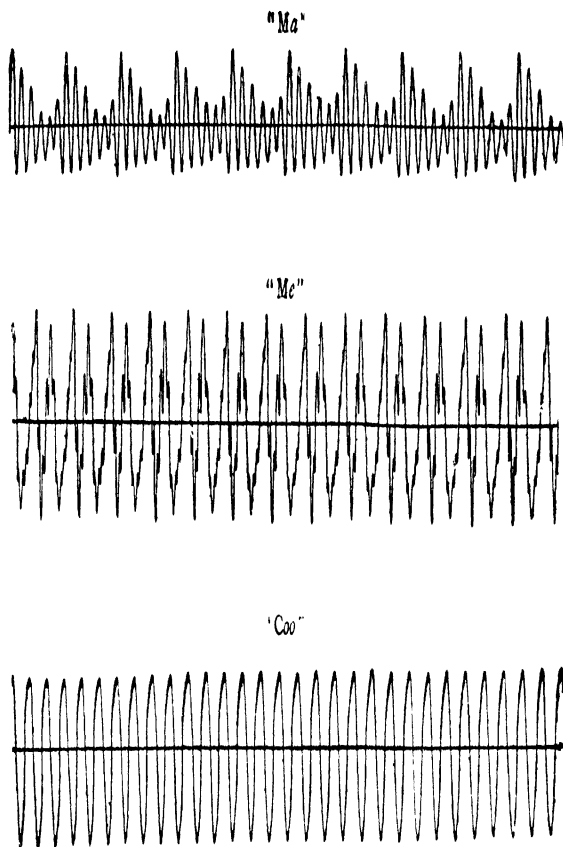


FIG. 5.—WAVES WHICH CAUSE VOWEL SOUNDS. From a paper by Mr. Duddell, in the Journal of the Institution of Electrical Engineers. [By kind permission of the Council.]

changes of air pressure, but they must actually resemble them in every small detail.

The changes of current must take place as rapidly as the changes of pressure, every slight check in the rate of increase of the one must be imitated by an exactly similar check in the rate of change of the other, and every increase or decrease by an equivalent increase or decrease. Without such exact similarity a sound of sorts may be transmitted, but it will be wanting in the quality which would distinguish one vowel or consonant from another; it will, in fact, be quite inarticulate.

The simplest way to get an understanding of how a pressure wave in air may have these characteristics is to hold out one hand, with the thumb uppermost, and move it to and fro. As it moves forward it presses against the air, causing a wave of compression to go forward, as the air waves from the bullet do in fig. 4. If you could move your hand to and fro at thirty or more times in a second it would produce a series of smooth pressure waves which the ear would appreciate as the sound "oo" sung on a note whose pitch would depend on the number of complete to and fro motions in a second.

If, however, instead of moving the hand in one smooth sweep from side to side you make it go by jerks, you will send out a pressure wave which will have in it a number of little extra waves in addition to the long one caused by the whole motion of the hand from right to left. A jerky motion like this, repeated sufficiently rapidly, would give to the ear the sensation


of some more complex sound, such, for instance, as the vowels "ah" or "ee." Which of the vowels or consonants would actually be produced, depends solely on the number and type of the jerks in each whole movement.

It is thus that the movement of the diaphragm in the reproducer of a phonograph or gramophone is able to produce sounds of every quality.

The smoothness or jerkiness of the motion of the vibrating body, whether it be the vocal chords, or the thin metal plate of a telephone, is therefore the essential thing which gives the sound its distinctive character and enables the ear to distinguish one word from another.

Of the functions of the ear itself and how it translates changes of pressure into sensations of sound, or even analyses a complex motion, very little is known. Its anatomy is, of course, well understood, and to a certain extent the functions of its parts, but beyond these elements comes the region of psychology—a science of which even the foundations have as yet been but imperfectly laid.

Suffice it to say that the drum of the ear is a thin membrane so formed that it is capable of vibrating to sounds of almost any pitch or complexity, and that from the drum the vibrations are conveyed by the corresponding motions of a chain of small lever-like bones to an inner organ which appears to be capable of analysing the vibration before transmitting the impulses along the nerves to the brain.



## CHAPTER II.

### HISTORICAL.

THE history of the invention of a practical method by which words spoken in one place could be heard many miles away without the use of any artificial connection between the speaker and hearer is an interesting episode in the development of mechanical civilisation. It is also an instance of the curious way in which a line of investigation which has been laboriously followed for years with considerable promise of ultimate success, is suddenly shown to be but a side track by some discovery as unexpected as any chance can be.

Fully twenty years after the first demonstration of the power of the photophone to transmit the voice by means of the flickering of a beam of light controlled by the sound waves of the speaker's voice, the invention of electric wireless telegraphy, bringing with it the possibility of an electric wireless telephone, altered the situation completely.

The greater power and freedom from interference due to atmospheric conditions which the longer electric waves possess made their adaptation to telephonic purposes a desideratum which excited the inventive powers of many workers in electrical science, and very shortly after the construction of the first practical wireless telegraph by Mr. Marconi, quite a number of patents were taken out for a telephone based on the same principles.

It is true there had been attempts at electric wireless telephony previously, but the apparatus required was extremely large and inconvenient, and the distances bridged but small.

The early patents based on the Marconi telegraph were, however, unsuccessful, for the simple reason that it was impossible to transmit, say, three thousand sound waves per second, by means of about one hundred electric impulses per second, particularly as the impulses were separated by intervals of time much longer than the duration of any one of them. The original wireless spark gave such impulses, with comparatively long blanks between them, during which nothing was transmitted.

It was impossible, therefore, under these circumstances to reproduce speech in which as many as three or four thousand vibrations may occur in a second. Experimenters, therefore, turned their attention to the production of electric sparks at a very much higher rate. Professor Fessenden, for instance, employed a rotating disc with a large number of metal knobs upon it which made and broke the connection between the battery and the transformer as often as ten thousand times a second. The result was that ten thousand impulses were radiated in every second and telephonic transmission of speech became possible.

This method, though it gave some sort of transmission, was not satisfactory, as unavoidable irregularities in the sparking caused a harsh noise in the telephone, and the articulation at the receiving end was very in-

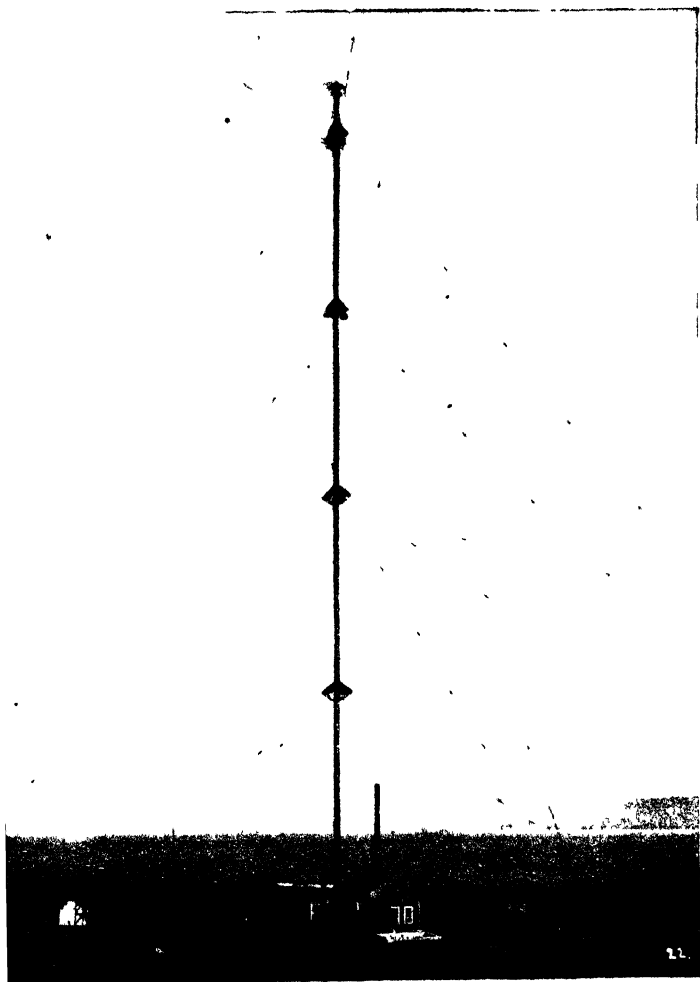


FIG 6 --Steel Tower, 415 feet high, at Machrihanish, in Argyllshire, used by the National Electric Signalling Co. for wireless communication with a similar station at Brant Rock, near Boston. Professor Fessenden's Wireless Telephony experiments have been mainly carried on between the latter and others in America.



distinct. Professor Majorana tried other methods to obtain the desired result, but with no greater success.

By adopting Elihu Thomson's method of producing a very rapid series of electrical impulses, and improving it in many details, Fessenden was at last successful in obtaining an intelligible wireless transmission of speech. This was in 1902, and since then progress has been rapid.

Four years later the same experimenter had so far perfected his apparatus as to be able to give a satisfactory demonstration, to a number of telephone engineers, of wireless telephony over a distance of eleven miles. At the same time he showed that it was possible to connect up a wire telephone system with a wireless one, and thus to have a line of telephonic communication which was in part a line wire and in part wireless.

In fig. 6 is shown the great steel tower which was erected at Machrihanish, in Argyllshire, by Professor Fessenden's Company, as an aerial conductor for transatlantic wireless telegraphy; it is from an exactly similar tower at Brant Rock, Massachusetts, that most of his wireless telephone experiments have been carried out.

In his later experiments Mr. Fessenden used an alternating current dynamo constructed to give from fifty to eighty thousand complete periods, or waves, per second. With this machine as a source of electrical energy, telephony is very clear and distinct, and has been carried on over a distance of several hundred miles.

The other early workers who had most success in getting practical results in telephony were Majorana, in Italy ; Poulsen, in Denmark ; the Telefunken Company and Ruhmer, in Germany ; and De Forest, in America.

Professor Majorana has worked long and indefatigably, and has attained great success both as regards clear transmission of speech and in the distance over which conversations have been carried on. His microphone transmitter has proved to be very efficient, not only for wireless, but also for wire telephony.

Mr. Poulsen's successes in telephony without wires are a natural outcome of the type of wireless telegraph which he has done so much to develop. Basing his inventions on Mr. Duddell's discovery of the musical arc, he obtained alternating currents of sufficient frequency and energy to enable him to carry on radio-telephony over long distances.

Using somewhat similar apparatus, the Telefunken Company made a large number of experiments about the same date, and is understood to have obtained satisfactory results. Mr. Ruhmer's system differs from those already mentioned in the employment of a very high voltage current as a supply. This, though advantageous from the electrical point of view, renders the operation of the apparatus by unskilled persons rather risky, since the voltage is high enough to cause danger to life should the operator touch the wires accidentally.

In America Dr. De Forest has done much for the development of radio-telephony as a practical means of

communication, his apparatus having been fitted on board the U.S. fleet which sailed round the world, and since then on other vessels and at inland stations.

To Dr. De Forest we also owe the *audion*, the three-electrode thermionic valve which is the parent of those now used almost universally in radio-telephony, both for transmission and for reception. It was by means of three-electrode valves that the voice of a man speaking in Washington was heard in Paris and Honolulu seven years ago. During the war radio-telephony made a great stride forward, largely through the experimental work of officers in the Royal Air Force, to whom its advantages for the communication of orders from the ground to aircraft in flight, and between the commander of a squadron and his subordinate officers, were so obvious as to make its development a matter of great urgency.

We shall now leave the historical development of the invention, and shall in the following chapters show how the waves of pressure in the air, which constitute the sound of a voice, can be converted into waves of electric current, and how these latter may be transmitted to great distances over land or sea and then be reconverted into air waves audible to the ear.

## CHAPTER III.

### THE CONVERSION OF SOUND INTO ELECTRIC WAVES.

SINCE the physical cause of every sound is simply a series of changes of pressure, electrical telephony resolves itself into the conversion of mechanical changes of pressure into changes in the strength of an electric current at the transmitting end, and the reconversion of these into mechanical motions in the receiver at the listener's ear.

The first instrument by means of which articulate speech was successfully transmitted electrically was the ordinary telephone, invented by Dr. Alexander Graham Bell about thirty-four years ago. Its début on this side of the Atlantic was at the British Association meeting at Glasgow in 1876.

The writer well remembers being taken as a boy to see the pair of wonderful little instruments by which the voice was transmitted some hundreds of feet from Lord Kelvin's (then Sir William Thomson) laboratory to the University Library across the quadrangle. To this day the receiver which one puts to one's ear is of the very same type; though at the transmitting end the microphone has taken the place of the original Bell telephone. That pair of telephones has multiplied enormously in the past thirty years, for there must now be several hundred thousands of them in daily use

## 18 *The Conversion of Sound into Electric Waves.*

in this country alone, and many millions in the world. Guinea pigs aren't in it.

The Bell telephone is exceedingly simple both in construction and in its action, which depends on the fact that change of magnetic force will induce a current in a wire placed near the magnet whose force is changed. In the figure the wire is shown wound round the magnet on a bobbin. The thin iron disc, which moves to or fro when the air pressure on it changes, causes at each movement a variation in the distribution of the magnetic force in its neighbourhood, and thus induces

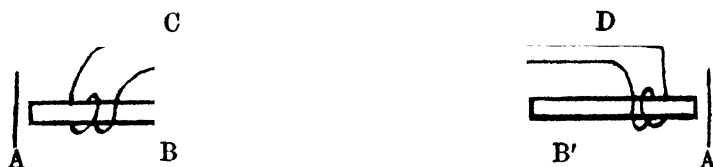


FIG. 7.—BELL'S TELEPHONE. A,A', Thin Iron discs; B,B', Magnets; C D, connecting wires. The motion of the disc A, when spoken to, causes a varying current in the wire, which in turn causes the disc A' to move in the same manner as A and thus reproduce the air waves, i.e., the Sound. The Ebonite covers are not shown.

in the wire currents which vary in time with the movements of the disc and are conducted along the wires to the other instrument.

As the current thus brought to the receiving instrument increases or decreases in strength, while flowing along the wire wound round the magnet, it adds or subtracts from the magnetic force of the latter, thus pulling in, or releasing, the thin iron disc near it. The disc, therefore, follows exactly all the changes of

the current, and consequently reproduces the motions of the transmitting disc which are the cause of these variations. The receiving disc thus causes waves of pressure in the air next to it which travel to the ear and are recognised as the voice of the speaker at the other end of the line.

The first great improvement in telephony was the invention, by D. E. Hughes, of the Microphone, and its adoption as transmitter in connection with a Bell telephone as receiver. In the original telephone line, as described above, the energy transmitted by the wire




FIG. 8.—HUGHES' MICROPHONE. B B, Carbon blocks; A, Carbon rod; C D, supports; E E, Wires to battery and telephone.

as electric current cannot be greater, and is, indeed, much less than the energy of the speaker's voice. With a microphone as transmitter, however, the energy of the current may actually be much greater than that of the spoken sound, for the microphone acts as a valve, not transforming sound energy into electric energy, but merely controlling the current from a battery. The microphone is, in fact, like the steam

valve, by turning which a child can control the movements of a great engine.

In its original form the microphone is a very simple instrument; merely two pieces of conducting material loosely touching one another and connected to a battery so that an electric current flows from one to the other through the point of contact. The most suitable material is carbon, one form of the apparatus being shown in fig. 8. Here the upper and lower blocks of carbon are slightly hollowed out and the double-pointed rod is loosely held between them.

Any change of pressure on the carbon rod causes it to press more or less firmly against the blocks, and thus increases or decreases the resistance of the contacts to the passage of the current. Since the electric pressure of the battery which drives the current through the resistance is a constant thing, a variation of the resistance causes a proportional variation in the current; hence, if the current be led by wires to a Bell telephone, the original sound, spoken to the microphone, will be reproduced.

The advantage of using a microphone instead of a Bell telephone as transmitter is that the variations of the current caused by speaking into the former are far greater than if the latter is used, their amount being only limited by the power of the carbon contact to carry current without becoming too hot. If the point of contact between the carbons does become very hot an arc is formed and the resistance is no longer varied by alteration of the pressure, thus though a large cur-

rent may be passing it may not vary in accordance with the sound waves. This natural limitation to the power of a microphone is one of the greatest difficulties in wireless telephony, for large currents are here essential and the problem of their control was a great difficulty prior to the invention of the thermionic valve.

There is a very large number of types of microphone in existence at the present day, some having a single variable contact, some several, and others a very great many. The last named are small boxes containing, between conducting discs at front and back, a quantity of carbon granules loosely packed together. It is this type which is most commonly used both for wire and for wireless telephony.

Prof. Majorana has devised a microphone on a totally different principle, and his achievement of wireless telephony between Rome and Sicily, a distance of 312 miles, is proof of its wonderful efficiency. A fine jet of conducting liquid falls just between two platinum plates, which are in the transmitting circuit, the nozzle being fixed to the diaphragm on which the voice acts. The vibrations cause the jet to vary in thickness, thus altering the conducting power of the film of liquid between the plates, and, therefore, the current which passes from one to the other.

In wire telephony there are many other subsidiary pieces of apparatus necessary to the production of the wonderfully loud and clear speech obtained in a modern telephone, but as these are not, in general, applicable to wireless transmission, it is unnecessary to go into detail.



## CHAPTER IV.

### WIRELESS TRANSMISSION.

IN ordinary wire telephony the electric current is guided, or conducted, from place to place by the wire. The words "guided or conducted" are literally true, but notice that they do not exclude the idea that the electric action we call a current takes place without, as well as within, the wire; indeed, they rather indicate that it is mainly outside. This is in fact the case, and the insulator outside the wire is in reality as important as the wire itself.

If the wire is to conduct a current it must be insulated throughout its entire length by air, india-rubber, cotton, or some other non-conducting material; also, if the current is to go on flowing in one direction, the conductors must form a complete circuit, *i.e.*, a closed loop joining one pole of the battery to the other. If the loop is not closed momentary currents will flow into the loose ends from the battery or dynamo, but these will cease when the conductors become full up with electricity.

On the other hand the importance of the insulator in transmitting the current can be understood to some extent from the following experiment. Suppose that two bare copper wires are hung up across a pond, and made into a closed conducting loop by connecting one pair of ends through a microphone and the others

through the wire wound round the magnet of a telephone. While they are insulated in the air speech can be transmitted from the microphone to the telephone, but if they be lowered into the water, which is a conductor, it will be found impossible to receive any sound at all. In order that electric current may be guided along a conductor it is therefore necessary that the conductor should everywhere be surrounded by a non-conductor.

An even more striking demonstration of the necessity for the insulator would be found by passing the two wires intended to form the circuit through two tightly fitting holes in a wall of copper a foot thick, forming one side of a completely closed copper room. In this case it would be quite impossible to transmit any current into the room by means of the wires, and experiment would show that where the wires entered the wall the current left them and passed across from one to the other, mainly in the surface of the copper which is in contact with the insulating air outside it.

Contrary to commonly accepted notions it is the fact that electric actions can be transmitted by an insulator without the presence of a conductor, although they cannot be transmitted by a conductor without the assistance of an insulator. Light, for instance, which is an electrical action, passes with ease through glass and other non-conductors, but cannot pass at all through copper.

The same is true of the longer electric waves dis-

covered, mathematically by Clerk-Maxwell, and experimentally by Hertz; they are reflected from a sheet of metal without penetrating it appreciably, can pass directly across an insulating medium without the aid of a conductor, though if there is a conductor they will follow it; but they become restive at any bend,

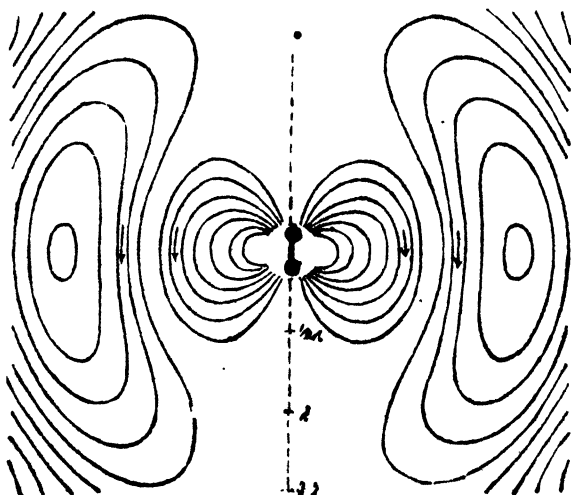


FIG. 9.—Electric waves radiating from a **dumb-bell-shaped conductor** with current surging to and fro in it. The lines show the direction of the electric force at the moment of the picture. The curves are enlarging and spreading outwards with the speed of light. [Hertz.]

preferring a straight path. Even ordinary alternating currents such as are often used for lighting, show a similar preference, and may be "choked" by bending the conductor into a coil of many turns.

In the figure 9 the closeness of the lines indicates the intensity of the force at the place; this is natur-

ally greatest near the radiator during its periods of maximum radiation, and decreases outwards from it. It should be noticed that there is no radiation in a vertically up and down direction, and that the maximum is in the line at right angles to the middle of the radiating conductor, *i.e.*, horizontally, if the conductor be vertical, as in the figure.

Here, then, we have the possibility of entirely wireless communication, the possibility of sending an electric wave right across an empty space to some instrument which can detect its arrival at the other side. The first wireless telephone was, indeed, of this type, although light waves, and not Hertzian waves, were the means of transmission. With the photophone, invented by Dr. Graham Bell in 1878, speech was transmitted several hundred yards, while with a much improved, though similar, form of apparatus, Mr. Ruhmer has recently been able to converse over a distance of several miles.

Telephony by light, or by short Hertzian waves, has, however, two great disadvantages which renders either method quite unsuitable for general use. The first of these disadvantages is that the radiation, and, therefore, the transmission of speech, can only take place in a straight line over clear country, for it is deflected or absorbed by intervening hills, trees, or other solid objects. The second objection which applies to light, but not to the longer Hertzian waves, is that even a fog will entirely prevent communication.

The first difficulty is, however, so serious that tele-

phony with short waves, as produced by Hertz, has not even been attempted, since the experience of wireless telegraphists has shown its impracticability.

Wireless transmission, whether for the purpose of telegraphy or telephony, is, therefore, carried out not by means of light, or even of free Hertzian waves, but depends on the use of electric currents conducted by the surface of the earth from the transmitter to the receiver.

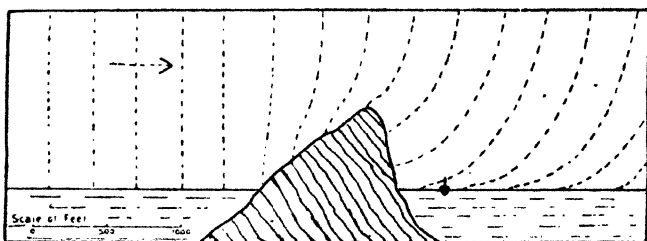


FIG. 10.—Electric Lines of Force (Waves) travelling over Sea and Land. Notice the bending behind the Island. [From *Wireless Telegraphy*, by J. Erskine-Murray.]

There are two methods by which this may be done, but only one of them is at all suitable for distances of over a very few miles. In the earlier form a long horizontal wire, supported on posts, is connected to the ground at both ends, one of the connections being through a microphone and battery. At the receiving station there is another long wire parallel to the first and connected to the ground through a telephone receiver. On speaking into the microphone the sound is heard in the telephone on the other line. The appli-

cations of this method are, however, very limited, for it is necessary that the length of each of the wires should be considerable, quite an appreciable fraction, in fact, of the distance between the stations.

The other method is that on which all modern wireless telegraphy and telephony depend. Only one earth connection is made at each station, the other end of the wire being elevated above the ground by a pole to a height which depends mainly on the distance between the stations. For distances up to twenty or thirty

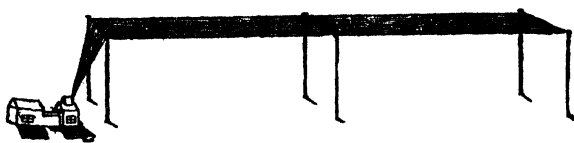


FIG. 11.—Aerial conductor of Mr. Marconi's at Clifden, Ireland. For short distance a fan shaped portion would be sufficient. The horizontal portion would give greater power for long distance.

antic Station  
e fan shaped  
res are added

miles an elevation of about fifty feet is sufficient, while for greater distances greater heights are advantageous. There are, of course, limits to the height to which a mast can be raised, so that in practice it is common to add to the radiating power of a station by extending the wire horizontally at the top, or by using several wires, or, finally, by using more powerful instruments.

Here there is no closed conducting circuit as in wire telephony. Each wire ends at an insulator at the top of a pole, and the space between them contains only air, which at ordinary atmospheric pressures is one of the most perfect insulators known. There is only

one conductor, therefore, between the stations, and this is the earth. Thus a steady current cannot be caused to flow from one to the other, all that is possible being a momentary current which dies out as the transmitting wire becomes full up with electricity. If, however, when this occurs the direction of the electric force in the transmitting wire is reversed, and the electricity forcibly driven out again, a further small quantity of energy is sent out along the earth's surface.

By repeatedly reversing the direction of the current in the transmitting wire we produce what is called an alternating current, and at each alternation a wave of current speeds out all round the station, ultimately dying away in the far distance. As this current sweeps in an ever widening circle past the receiving station it rushes up the wire, falling back again as the wave passes;—like a wave of the sea in a blow-hole on a rock-bound coast;—again surging up as the next wave passes. It is by means of this alternating current, radiating from the sending station and affecting the receiver as it passes outwards, that sound is transmitted in wireless telephony.

Now since at each alternation only a small quantity of energy is sent out, and of this small quantity only a minute fraction reaches the receiver, the rest going in other directions, it is clear that the alternations must be made to follow one another very rapidly in order that the quantity of energy arriving at the receiver in a given time may be appreciable.

The current in the transmitting wire must, therefore, alternate at a high frequency, *i.e.*, its direction must be reversed, and a wave sent out, not less than, say, a hundred thousand times in a second. A hundred thousand waves per second seems a great many, though as a matter of fact it is but a small number for wireless transmission, and incomparably smaller than the five-hundred-million-million waves of light which enter the eye in the same period of time.



## CHAPTER V.

### THE PRODUCTION OF ALTERNATING CURRENTS OF HIGH FREQUENCY.

THERE are several ways in which the electricity may be made to move to and fro at a very high rate. The simplest to understand, although not as yet the most usual in practice, is to use an alternating current dynamo so constructed that it gives a hundred thousand alternations per second, or thereabouts, instead of the usual number of fifty or a hundred employed in electric lighting circuits.

The difference is, of course, a very great one, necessitating the use of two or three hundred magnetic poles on the machine in place of, say, half a dozen, and the machine must have a very high speed of revolution. Professor Fessenden has used this type of high frequency current generator with success in America, obtaining a very clear transmission of speech over considerable distances by modifying the current in accordance with the sound waves by means of a microphone.

The dynamo is based on Faraday's discovery that if the end of a magnet be moved near a wire a current will be generated in the wire. An alternating current dynamo, therefore, may consist of one or more magnets mounted on a shaft, with their ends sticking out from it like the spokes of a wheel. Surrounding the mag-

nets, but not touching them as the rim of a wheel would its spokes, is a fixed iron ring, like a magnified wedding ring in shape, on the inner surface of which is a large number of parallel saw cuts in which insulated wires are laid. Suppose now that a wire is laid in one slot, and then has its loose end bent back and laid in another slot, the two ends being connected to the apparatus to which it is desired to supply the current. The wire is now shaped like the letter U, each leg lying in a slot.

Now drive the shaft round by starting the steam engine or turbine attached to it. As the end of a magnet passes the part of the wire in the first slot it will create a current in it which will flow from right to left, and therefore, say, from one end of the wire, A, to the other, which we may call B. As the magnet passes away from the slot the current dies out. The magnet now, however, commences to influence the part of the wire in the second slot, producing, as before, a current from right to left. The result now in the circuit is therefore a current from B to A. Thus, as each magnetic pole passes the slots it causes a to and fro motion of electricity in the wire, and since the direction of this motion alternates between being from A to B, and being from B to A, the current is called an alternating current.

An ordinary alternating current dynamo is built on these principles, the only difference being that wires are put in all the slots on the inner side of the ring and are connected to one another so that each contributes to the production of current in the outer circuit

where the work is done. The ring with the wires in it is called the armature.

The number of alternations of the current depends directly on the number of poles which pass a given wire of the armature winding per second. Thus the higher the speed of revolution and the greater the number of the poles the greater is the frequency (number per second) of the alternations of the current. The difficulties of this method are mainly mechanical or depend on mechanical conditions. Thus the speed of revolution is limited by the strength and weight of the moving parts—they would fly to pieces if driven too fast—the magnetic poles have, therefore, to be placed very close together, which is disadvantageous from an electrical point of view. The friction of the air at such high speeds as are necessary is also considerable.

These considerations, coupled with the expense of constructing machines of this type, have led many experimenters to adopt another method depending on an entirely different principle. In the alternator the movements of electricity are produced by the changing magnetic force on the wires due to the motion of the magnetic poles across them; in this other method a steady current is converted into an alternating one, or, rather, a part of it is so converted, in the same manner as a steady blast of air is changed into to and fro waves of pressure, *i.e.*, sound, by an organ pipe, or whistle.

Here the resistance to the passage of a draught of

air through a certain opening in the pipe is variable owing to the bending of the lip under the pressure of the air blast against it. In the reed pipe the natural

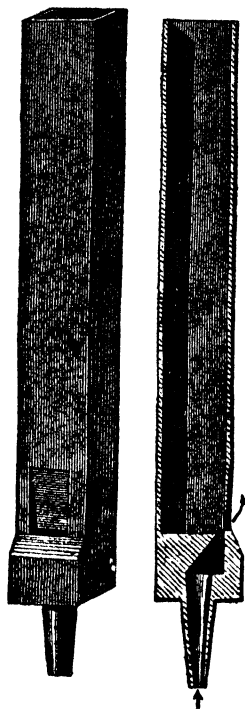


FIG. 12.—ORGAN PIPE, showing air blown against lip. Note the hollow part of the pipe (from the lip upwards), which controls the rate of vibration. The longer the pipe the slower the vibration.

rate of vibration of the reed itself controls the sound given out, but in the ordinary pipe, or whistle, the lip has no definite rate of vibration of its own, and the

pitch of the sound produced is determined by the length of the column of air enclosed by the pipe.

In what is usually called the "arc" method of producing alternating currents the general principle is much the same as that of the ordinary whistle, except that an electric current is substituted for a blast of air; an electric resistance, which varies with the strength of the current through it, for the varying resistance of the lip, and a combination of conductors which has a natural rate of electric vibration for the column of air enclosed in the pipe.

The most suitable kind of variable resistance is a short gap filled with air or other gas between two solid conductors. When cold the resistance of such an air space is enormous, but when heated by the flow of a current across it, its resistance falls to a few ohms, and under proper conditions every little variation in the strength of the current causes a corresponding change in the resistance opposing it. Across the ends of this variable resistance is connected the system of conductors which determines the frequency or pitch of the electrical vibration, *i.e.*, the frequency of the alternating current produced. Expressed in ordinary language, 'frequency' means the number of times that the current goes to and fro in one second.

On sending the current from a direct current dynamo, or from a battery, through the air gap the electricity in the circuit attached to it commences to move to and fro at a rate which is controlled mainly by the electrical dimensions of the conductors, and con-

tinues to do so as long as the direct current is supplied. Here, then, we have a simple method of obtaining alternating currents whose frequency may be made as great as desired by changing the dimensions of the conductors of the circuit.

Like all other methods it has, of course, its weak points, but these have been overcome to a great extent by proper design of the apparatus.

In order that the variations of the resistance of the air gap may be large it is necessary that the air and the surfaces of the conductors from which the current passes across it, should be cooled as rapidly as possible. A very great deal of ingenuity has been expended on devising methods for doing this satisfactorily and without too many complications. As examples of these we have the copper electrode, cooled by air or water, used by Poulsen and others, the comparatively large metal plates separated by a layer of air only as thick as a sheet of paper which von Lepel uses, or the blast of air caused by the rapid motion of the plates in the Marconi apparatus.

Hydrogen gas, either in the form of a gas or alcohol flame, or in an enclosed arc lamp, has been used by Tesla and Poulsen to increase the efficiency of an arc as generator of the high frequency current; its function is not thoroughly understood, but it has undoubtedly the power of conducting heat away very rapidly, and it prevents the burning away of the electrodes which takes place in air, both of which properties are advantageous.

Many different forms of circuit have also been invented, though as yet the most successful telephony has been carried out with the earlier and more elementary forms. They all depend on the principle that under certain conditions as regards their relative dimensions, the electricity in a set of electrical conductors connected together will, when set in motion, oscillate to and fro at a definite rate.

There are many mechanical analogies by which this principle may be illustrated, two of the simplest being the violin and the watch. In the violin the steady forward motion of the bow produces the to and fro motion of the string; in the watch the forward motion of the mainspring produces the to and fro motion of the balance wheel. The two are typical of the two chief methods by which a direct electrical current may be converted into a high frequency alternating one suitable for wireless telephony.

The violin corresponds to the "arc" method, and the watch very nearly, if not quite, to the impulse method. In the violin the bow moves steadily on, while the string is caused by it to move to and fro; and in like manner the steady current in the arc produces an alternating current in the circuit connected to it. In the watch the intermittent, though always *forward*, motion of the wheelwork causes the balance wheel to vibrate backwards and forwards, just as the direct current impulses in valve sets and in such systems as the Lepel, cause the production of an alternating current.

In what follows the motion of electricity in the cir-

cuit is compared with the motion of the materials composing the springs and wheelwork of the watch.

The drum containing the mainspring slowly moves round as the spring unwinds itself, its motion being always in one direction—compare this to the supply current. This forward motion is transmitted by the train of wheelwork to the lever of the escapement which starts the balance wheel turning in one direction.

The wheel, however, does not turn far, as in turning it tightens the hair spring, and when the energy of the impulse given to it by the lever has all been used up in tightening the spring the force of the latter causes the wheel to reverse its motion. As it swings back it does not stop in its first position, but turns beyond it until the spring again checks it, and incidentally the escapement is released so that the lever is able to give another forward push. Here we have the direct forward motion of the driving mechanism converted continuously into the to and fro, or alternating, motion of the balance wheel. Moreover, the alternating motion is at a perfectly definite rate, each to and fro movement of the balance wheel taking in some watches a quarter of a second, in others a fifth.

This rate of oscillation is controlled by the dimensions and weight of the balance wheel and the stiffness of the hair spring, and does not depend on the force exerted by the mainspring. If it were not so the watch would race when it had just been wound up, and go very slow towards the end of the twenty-four hours.



### 38      *The Production of Alternating Currents.*

A good timekeeper does not do this, so its rate must be controlled by the balance wheel and hair spring alone.

The inertia of the balance wheel in the watch is like inductance in an electric circuit, it tends to make the wheel go on moving in the direction in which it is moving, while inductance tends to make the electricity do the same. The spring is like an electrical capacity, it checks the motion of the balance wheel, and when it has become tight reverses that motion; the capacity in a similar way checks the motion of the electricity poured into it and then drives it back the way it came.

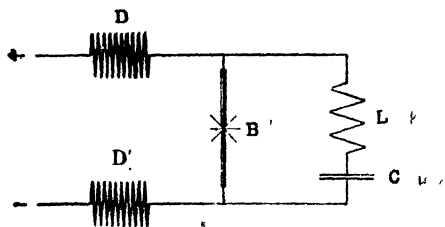


FIG. 13.—ELECTRIC ARC CIRCUIT FOR PRODUCING ALTERNATING CURRENTS OF HIGH FREQUENCY.

Every conductor which is surrounded by an insulator has inductance and capacity. The inductance of a conductor can be increased by bending it into a coil, and the capacity by flattening it out at both ends, placing the plates so formed near to one another with insulating material between them. In practice the plates are naturally made from sheet metal or foil, and are connected to the wire which forms the rest of the circuit by soldering or screw connectors.

In fig. 13, *L* represents the inductance, *C* the

capacity, and B the gap of variable resistance. The supply current comes in by the wire D and leaves by D', which are connected to the dynamo, or battery. The battery corresponds to the mainspring of the watch, the leads to the wheelwork, the gap to the escapement, the inductance to the balance wheel, and the capacity to the hair spring.

The circuit L C B thus has in it an alternating current, the frequency of whose alternations is controlled by the dimensions of L and C. This circuit can, therefore, be used as a source of alternating current energy to be modified by the microphone, and finally radiated by the elevated conductor, or aerial wire of the station, from which the speaker is telephoning.

Many other forms of circuit are employed in recent generators of high frequency current, and the details of their electrical actions are different; in some methods energy is taken from the supply current during part of every wave, in others it is only taken intermittently at perhaps every third or fourth wave, in all cases, however, the object is to obtain a steady alternating current of high frequency from direct current or from low frequency alternating current.

The most convenient form of generator of high frequency current, as yet discovered, and that which is now almost universally used for radio-telephony, is the audion or thermionic valve. This has a glass bulb like that of an ordinary electric lamp, but inside there are two unheated metal conductors in addition to the electrically heated filament. One of these conductors

is a small plate of metal, either flat or bent into cylindrical form; and between it and the filament is fixed a grid of fine wire. Connecting wires are brought from these conductors to external terminals, and the air is pumped out of the bulb until the space inside is as good a vacuum as it is possible to obtain.

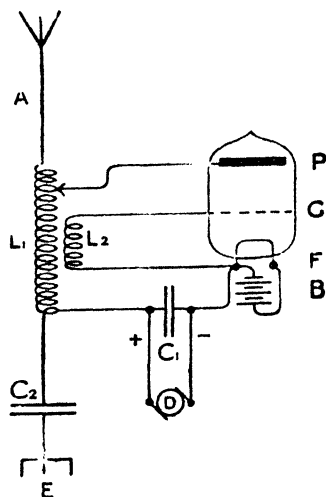


FIG. 14.—VALVE AS PRODUCER OF ALTERNATE CURRENT OF HIGH FREQUENCY. A, Aerial; E, Earth; P, Plate;  $L_1$ ,  $L_2$ , Coils; G, Grid; F, Filament;  $C_1$ ,  $C_2$ , Condensers; B, Filament battery; D, Power supply.

In the early days of the electric lamp Edison discovered that, when a lamp was alight, the inside of the bulb became coated with a charge of negative electricity. Experiments showed that the source of this charge was the white-hot filament. It was thus proved that negative electricity, or, as we should say now, a stream of electrons, is given off by a hot

conductor in a vacuum, and can be collected on a cold metal plate in the bulb and led out along a wire if desired. Thus, if we connect the hot filament to the negative end of a battery and the cold plate to the positive, a current will continue to flow through the bulb so long as the filament is kept hot by the separate battery supplied for the purpose. This current, however, cannot be made to flow in the reverse direction, as cold metal does not give out electrons into a vacuum.

The grid of fine wire between the filament and the plate was introduced by De Forest, to provide a means of controlling the current flowing from one to the other. When the grid is made negative it repels the electrons back towards the filament, and thus checks their flow; while if it is positively electrified it attracts electrons from the filament, increasing their speed, so that many shoot through its interstices and reach the plate. Mere alteration of the voltage on the grid thus controls the current between filament and plate. We have here the elements of another possible way of producing high frequency current from the direct current given by an ordinary generator.

Take a circuit in which electricity has a definite natural rate of oscillation, *i.e.* one which has capacity and inductance in series and has only small resistance, and couple it to the grid and filament of a thermionic valve in such a way that at every oscillation a puff of current from the source of supply is allowed to flow in the proper direction to assist the current which is at the instant flowing in the oscillating circuit. Power

will thus be supplied to the oscillating circuit during one half of every complete oscillation, the energy of the oscillation will be maintained, and power may be radiated from the circuit as electric waves. The balance wheel of a watch is again the mechanical model.

The arrangement of a simple type of valve generator of high frequency currents is shown in fig. 14, and its construction and action may be described as follows: Connect the grid of a valve to a small coil of wire (see fig. 14), the other end of which goes to one terminal of the filament. Connect the plate through another small coil to the positive terminal of the main supply, which, for the purpose of transmission, should be at several hundred volts. The two coils are placed close together, and the ends of the second are connected to the aerial and earth wires from which the waves are to be radiated. The negative of the supply is connected to one filament terminal, and there is a condenser to make a path for alternating, but not direct, current between the supply terminals. The filament is heated by the current from an accumulator battery of suitable voltage for the valves used.

The moment the supply is switched on, a current of electrons begins to flow between filament and plate. In passing through the small coil it induces a voltage in the circuit of the grid, which, acting on the electrons in the valve, tends to increase the flow; but when it has reached a maximum the induced voltage goes back towards negative, and tends to reduce the plate current. As the plate current dies out, the voltage it induces on

the grid returns towards a positive value, and so the cycle recommences. The whole is thus acting as a valve, by which the current is turned on and off just at the proper moments to maintain the oscillation in the aerial circuit. Since the aerial wire, coil, and earth form an open circuit, which has a natural and definite frequency of oscillation, the cycle will be repeated uniformly, and at each repetition power will be taken from the direct current supply by the unidirectional puff of current in the plate circuit, and will maintain an electric alternating current in the aerial-earth wires in spite of loss of energy by the radiation of electric waves.

## CHAPTER VI.

### HOW THE ELECTRIC WAVES ARE RADIATED AND RECEIVED.

IN the last chapter it was explained how an alternating current of very high frequency can be generated; in this it will be shown how such a current can be modified in strength to correspond with the sound waves of speech, radiated from the transmitter, and received at a distant station.

The reasons why it is necessary to use a current of very high frequency;—*i.e.*, a current which reverses its direction a great many times in a second;—were partially explained in Chapters I. and III. Firstly, the frequency must be greater than 30,000 per second, for a lower rate would produce a loud note in the receiver which would interfere with the sound of the voice; secondly, it is much more easy to radiate a considerable amount of energy if the frequency be high.

What is required in wireless telephony is, therefore, a means of modulating the average strength of the alternating current affecting the receiver so that the current produced in the receiver shall be exactly proportional to the air pressure of the sound wave on the transmitter. Note that we are not now dealing with the actual current at any particular moment, but with the average rate at which the re-

ceiver is absorbing energy, or to put it more concretely, with the energy of each complete alternation, or wave, of the current. In wire telephony we dealt with the

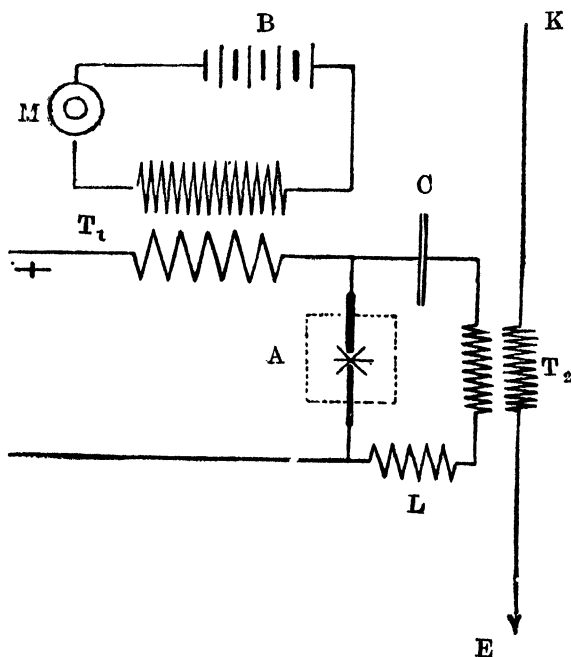


FIG. 15.—WIRELESS TELEPHONE TRANSMITTER. M., Microphone; B, Battery; T<sub>1</sub>, Transformer, through which microphone current controls supply to arc A; A, Arc; C, Capacity; L, Coil of Wire giving inductance; T<sub>2</sub>, Coupling of Generating Circuit A C L to Radiator or aerial K T<sub>2</sub> E.

actual value of the current, at any moment; here we deal with its average value taken over the very short time of one alternation,



In wireless telephony the energy absorbed by the receiver may be varied in two ways; either firstly, as in wire telephony, by varying the strength of the transmitted current by a microphone; or secondly, by varying its frequency by some other device.

There are several methods by which the radiation may be controlled so that it shall correspond exactly with the sound waves spoken into the transmitter. For instance, as in fig. 15, the microphone may control the supply current. If valves be used the arrangement may be as in fig. 16, where the modulation is effected indirectly by use of a control valve (B) in addition to that (A) which produces the high frequency current. In fig. 15 the microphone current acts by induction on the supply current, causing it to increase or decrease in sympathy with the sound waves impinging on the microphone.

The two coils of wire placed near together, but not conductively connected, by means of which the action is transmitted from the one circuit to the other, are called a transformer. The principles of its action are simple experimental facts, viz., that every current has magnetic force all round it, the strength of which is proportional to the current; and secondly, that any variation of the magnetic force near a conductor produces a current in that conductor. The first applies to the action of the microphone current in producing a variable field of magnetic force, and the second to the effect which the variations of this force have on the coil in the supply circuit. There is a kind of wireless

telephony between the two coils, but not one which is applicable to transmission over long distances, for in order that the one coil may act appreciably on the other the distance between them must be much less than with aerial wires.

In fig. 16 the sound waves are converted by the microphone into variations of electric current, and

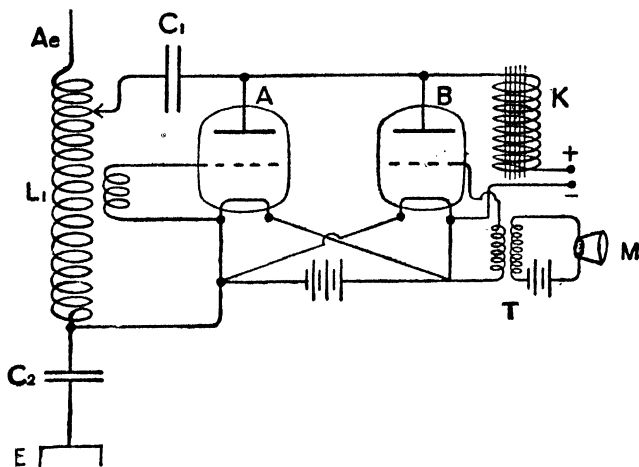


FIG. 16.—Ae, Aerial; L, Tuning Inductance;  $C_1$ ,  $C_2$ , Condensers; E, Earth; K, Choking Coil; M, Microphone; A, B, Valves.

these, acting through the coupling transformer (T), cause similar variations in the voltage on the grid of (B). The voltage on the grid controls the current between plate and filament, hence the current which the valve (B) takes from the supply will vary with the sound waves spoken into the microphone. A choking coil (K) prevents any rapid change of the supply

current; if, therefore, (B) suddenly takes more current, (A) will get less, and the radiation from the aerial will be less in the same proportion. Thus through this chain of actions the speech waves in the microphone control the strength of the radiated electrical waves, and as these fly out from the station their strength is at every moment proportional to the air pressure of the sound wave which is being spoken into the microphone. This indirect method has some advantages over the more obvious one of coupling the microphone to the grid circuit of the oscillating valve.

There are many forms of aerial conductor from which the current may be made to pass outwards along the earth's surface. Probably the best so far devised for wireless telephony is the fan-shaped aerial, or "antenna," as it is sometimes called, it has large capacity, low resistance, and small inductance—conditions which are favourable to the radiation of a large amount of energy with the kind of current used.

The lower end of the aerial wire is led into the instrument room and is there connected to one terminal of the current generating circuit, the other terminal of which is connected to a large metal plate, or network of wires, sunk in the ground. The electricity in the wire, from the earth to the top of the pole, may be likened to the string of a violin, the generator to the bow which causes it to vibrate, and the earth, to which the wire is attached, to a vast "sounding board." Only in making this comparison it must be remembered that

it is the inaudible electric waves that are transmitted outward and that they can only be heard by being converted into sound by means of a proper receiver.

Since the current is actually conducted by the earth the electrical resistance of the ground has a great influence on the distance to which wireless transmission, either telephonic or telegraphic, is possible. Thus over sea, which has a very low resistance, the possible distance of transmission is much greater than over land, and similarly transmission is more easy over moist than dry soil. The differences are very considerable; a station which can transmit speech fifty miles over dry land being able to give equally good communication over about two hundred miles of sea. It is lucky that this is so, for in a world whose surface consists mainly of sea, the greater part of any long distance line of communication is usually over water.

There is another factor which affects the ease with which wireless communications can be carried on besides the resistance of the ground; it is called its specific inductive capacity or dielectric constant. This is greater for water than for any other substance, and adds, therefore, to its advantages as a conductor for wireless transmission. In order to show the relative ease of transmission over sea and land I have taken the following numbers from an interesting paper on the subject written by Dr. Zenneck; in each case the number given represents the distance in travelling over which the electric wave will be reduced to about one-thousandth of the value it had at one kilometer from

the transmitting station, on the assumption that energy is not wasted in the atmosphere, but only in the ground or sea.

This assumption is only correct for short distances, but the results are, nevertheless, interesting as a first approximation. The numbers given then indicate the distance at which the wave is reduced, by resistance of the ground and by the fact that it forms a circle of ever increasing diameter, to a thousandth part of what it was at one kilometer from the sending station; they are : over sea, 5,000 kilometers; over wet ground, 100 kilometers; over dry ground or rock, 30 kilometers. In actual practice the first number would be considerably reduced by atmospheric absorption, probably to something under 500 kilometers, the others remaining practically unaltered.

Atmospheric absorption also accounts for the curious difference between day and night, which Mr. Marconi discovered, and for the different amount of absorption which waves experience in passing over the same distance on different days.

Although transmission from an aeroplane at a great height is better than from the ground, no attainable elevation is great enough to eliminate the effect of the earth except for short distances of transmission.

At the receiving station there is an aerial conductor and earth connection exactly like those at the transmitting end, but they are connected to the receiving instruments instead of to the generator. In actual practice there is a receiver and transmitter at each

station, either of which can be connected to the aerial and earth wires, so that speech can be transmitted from, or heard at, either station.

As each wave of electric force passes the receiving station it causes the electricity to move up and down again in the conductor between the ground and the top of the pole, and in so doing affects the receiving instruments; how these act will be explained in the next chapter.

## CHAPTER VII.

### THE RECEIVING INSTRUMENTS.

THE object of the receiving instruments is to convert the variations in strength of the electric current into sound waves. A diagram will make this clearer. In fig. 16 (A) represents some sound waves as spoken into the transmitter, (B) the electric waves corresponding to (A) radiated from the transmitter and picked up by the receiver, and (C) the sound waves similar to (A) produced by the receiver from the electric waves (B). In the receiver there are two steps in the conversion of the received current into sound waves; the first being from alternating current of high frequency into a direct current whose strength is always proportional to the average value of the alternating current, and secondly, the conversion of this varying direct current into air pressure waves by means of the Bell telephone. The first of these processes is the distinctively "wireless" one, the second being the ordinary telephonic reception which has been described in an earlier chapter.

Before coming to the actual transformation of energy we must go, in some detail, into the way in which the energy of the radiant current from the sending station is captured by the receiving aerial and transferred to

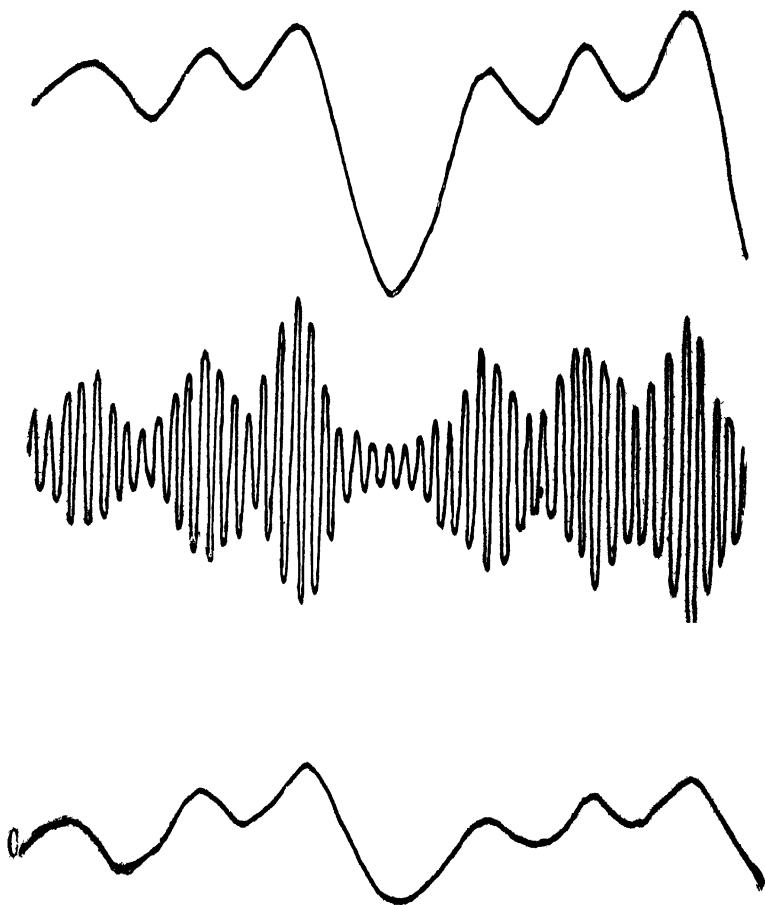


FIG. 17—A represents a sound as spoken into the Wireless Telephone B represents the corresponding Current Radiated. C represents the waves A as reproduced by the receiver from the waves it absorbs from its aerial wire on which the waves B are striking.



the circuit in which the conversion into direct current takes place.

So far the action of the electric forces in inducing currents in the circuits of the receiver has been described as if the current at any moment was a purely "forced" one which was simply proportional to the external electric force acting on the circuit at that moment. It is possible to work under such conditions, but there is a much more efficient method which depends on the principle called by Lord Kelvin, "the superposition of small periodic motions." This principle is of such universal importance in natural philosophy that it is worth taking some trouble to understand it thoroughly. The best way will be to consider some concrete examples.

We all know how one child swings another in an ordinary swing by giving a succession of little pushes just at the moments when the swing has reached the highest points of its backward motion, and we know that after twenty or thirty properly timed pushes have been given, the motion of the swing is so great that to attempt to stop it suddenly at the bottom of its course is to take the risk of being knocked over. The fact is that the energy of all the little pushes has been stored up in the moving swing, and to stop its motion suddenly requires a force which is equivalent to the sum of all the pushes given to it since it started. The small motions are superposed on one another, the result being a single, much larger motion.

If the pushes are not properly timed no such storage

of energy will occur, and the motion of the swing will not grow larger and larger, but will be as much checked by the pushes which are out of time as it is assisted by those which synchronise with its natural time of swing, the result being a small and irregular motion, quite unlike the energetic oscillation produced by the properly timed impulses.

In the following case the rate of vibration is more rapid. Press down the loud pedal of a piano, *i.e.*, remove the dampers from the strings, and sing a note. When your voice has ceased you will hear the note sounding in the piano. Sing another note, it will also resound.

Here the oscillation is much more rapid, there being two hundred and fifty-six complete to and fro motions in a second if the note be middle C, instead one in four or five seconds, as is the case with the swing. The way in which the string gets up its vibration is, however, just the same. At each vibration of the vocal chords a wave of pressure goes out from the throat, and reaching the strings, gives every one of them a tiny push. A two hundred and fifty-sixth part of a second later the second pressure wave comes along, and after it, at equal intervals, follow many more. All the strings of the piano become slightly agitated, but only one gets into energetic vibration, namely, the one whose length, weight and tension are such that it vibrates freely 256 times a second if plucked and left to itself.

It is the only one to which the impulses of the voice

come exactly rightly timed so that each adds its motion to the motion the string has already acquired, increasing it until it is sufficient to be audible. If a different note be sung it is, of course, another string which will respond.

In an exactly similar way it is true that an electric circuit will respond most readily to impulses which come timed to its own natural rate of vibration. It is the equalisation of the natural frequency of the receiving circuit to that of the transmitted impulses or waves that is called tuning in wireless telephony and telegraphy. The transmitter and receiver in all wireless telephones are tuned to one another, and if there are several circuits in either instrument, through which the alternating current has to flow, all of them are tuned to the same frequency.

By making use of the superposition of small motions we thus gain two notable advantages; firstly, from a series of small impulses a large motion can be built up, and secondly, no appreciable motion will be produced unless the impulses be properly timed to the natural rate of vibration of the second vibrator.

The principle applies to all vibrations however slow or however fast, whether mechanical or electrical, and even to the extremely rapid vibrations which constitute light. Both advantages have an important bearing on wireless transmission; the first making it possible to obtain signals or transmission of speech, at great distances, by mere repetition of small impulses without it being necessary to send any very energetic ones; the

second providing a means of working several stations at once in the same neighbourhood without interfering with one another. This latter is accomplished by arranging the stations in pairs, each pair working with a current having a different rate of alternation from the other pairs. Each receiver will then receive only the messages from its corresponding station and not from any other. The arrangement can, of course, be changed in a few seconds so that any one station can communicate with any other.

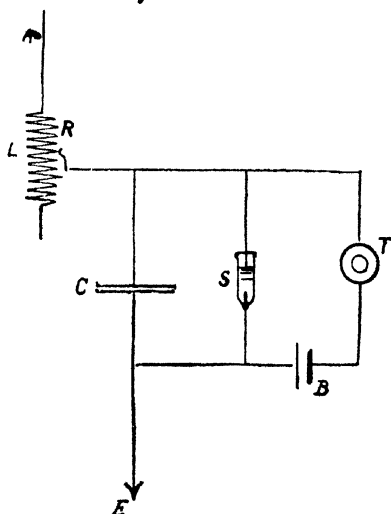


FIG. 18.—A SIMPLE WIRELESS TELEPHONE RECEIVER. T is the Telephone; B, a Battery; S, the Detector, which turns the high frequency alternating current received into currents which can affect the Telephone; C, a Capacity; L, an Inductance, being a coil of wire with a sliding connection, R, for tuning the aerial earth circuit A R C E to the frequency of the transmitted current; A, the aerial conductor; E, the Earth connection.

As yet it is not possible to locate so large a number of stations in one district as would be required to replace the wire telephone system of a town or populous country, so there is no immediate likelihood of wireless telephony taking the place of the wire, but in a sparsely populated district, between islands, and across long stretches of forest or desert where the maintenance of a wire or cable is extremely costly and difficult, wireless certainly provides a more reliable and less expensive service.

The principle of resonance is applicable not only to transmission from the sender to the receiver, but also to the internal arrangements of both transmitting and receiving apparatus. Thus, in the receiving station there is usually more than one circuit, and each circuit has such dimensions that the natural rate of oscillation of electricity in it is the same as in the other circuits.

The current from the sending stations is thus, as it were, filtered out, in passing from one circuit to the next, from any interfering currents which may be going about. Of course it is possible to talk over a telephone and be understood in spite of a good deal of extraneous noise and "cross-talk," but it is naturally advantageous to reduce interfering sounds to a minimum.

One way by which interference between neighbouring stations may be reduced is to use directive aerials, that is to say, aerials which radiate or pick up signals from some directions and not from others. Thus a flat spiral coil of wire receives best from directions in its plane,

and is not excited by waves coming from stations in the direction of its axis; hence, by turning it edge-on to the station to be received, signals from stations at right angles will be cut out. There are many developments of this directive aerial principle in existence, one of the most important in radio-telephony being Franklin's arrangement of aerials which forms a reflector, sending the transmitted waves out like the beam of a searchlight and, at the receiving end, focussing them on the receiving aerial. When using short waves of fifteen or twenty metres' length, with reflecting aerials at both ends, the saving in the power required for a given distance is very considerable, and there is little of interference from other stations. This scheme would be excellent for fixed ground stations, but one often wants to speak to an aircraft or ship when one does not know where it is, and thus could not direct the waves towards it. In such a case it is better to use aerials which have equal radiating powers in all directions.

To make a coil aerial suitable for the reception of radio-telephony or telegraphy on wave-lengths between 300 and 600 metres, take two pieces of wood, say, one and a half inches square by four feet long; fix them together at their middle points to form a cross with equal arms. On the end of each arm fix a cross piece six inches long at right angles to the plane of the main cross, and wind five turns of covered wire round the frame, spacing them about an inch apart. You have thus got a coil about three feet square and four inches

wide. Connect the end of the coil to the terminals of a variable condenser and to the terminals of your detector. An amplifier of some sort will be necessary unless you are very near the transmitting station, as the coil will not pick up nearly as much energy as an open aerial of standard "Post Office" dimensions.

## CHAPTER VIII.

### DETECTORS AND AMPLIFIERS.

WE now come to the detector which converts the high frequency current into a direct current capable of causing audible sounds in a Bell telephone receiver. In the simplest type suitable for telephony a small sharp point of some material, often graphite (black lead), or some hard crystal, such as carborundum, presses against a surface of a metal or metallic sulphide. Wires are connected to the two materials, and the high frequency current, coming from the transmitting station *via* the earth and the aerial wires, passes from one to the other. In doing so it heats the fine point and thus causes the detector to become a generator of direct current, for it is a well known fact that if a junction of two different materials in a circuit be heated to a higher temperature than the rest of the circuit, a current, driven by the energy of the heat absorbed at the junction, is produced in the circuit.

This kind of current-production is called "thermo-electric." Many detectors have, in addition, the property of rectifying an alternating current, that is to say, of permitting current to pass more easily in one direction than in the other. By this means the high frequency current received becomes converted into direct, though pulsating, current which, if it varies in strength, will produce a sound in a telephone receiver.



A thermo-electric detector thus turns high frequency alternating current into direct current in two steps, firstly, the alternating current produces heat at the point of contact, and secondly, the heat produces a direct current because of the difference of the materials. In the case of the types which rectify the current the action is as yet not properly understood, though it appears to be due to the curious electrical phenomena discovered by Peltier; viz. that, when a current passes from one material to another, heat is produced when the current flows in one direction and cold when the direction is reversed.

The electrolytic detector is also suitable for telephony. The most usual form consists of a very fine platinum wire a thousandth of an inch or less in diameter, one end of which just projects from one end of a glass tube which has been melted so as to fit closely round the wire. The point is placed in an acid solution and connections are made from the fine wire and solution to the receiving circuits.

In another form the electrolytic detector consists of an extremely fine tube filled with liquid connecting two larger vessels containing the same fluid, connections being made to the liquid in the latter. A battery of two or three dry cells is used to keep current flowing through the liquid, the cells being connected to an arrangement of wires termed a potentiometer, or potential divider, by means of which any desired fraction of the total electric pressure of the battery can be applied to the detector.

The potentiometer is adjusted until a faint hissing sound is heard in the telephone which is in circuit with the battery and detector. In this condition the detector is found to be very sensitive to high frequency currents, *i.e.*, a momentary current received from the aerial wire and transmitted by the receiving circuits through the detector, produces a sharp click in the telephone, while continued increases and decreases, if rapid enough, produce a continuous sound. The detector is, therefore, suitable for telephony.

There are many other detectors more or less suitable for telephonic reproduction of speech, such, for instance, as those in which the active portion of the circuit is vacuous instead of liquid or solid—a type which has been used for telephony by Dr. de Forest—and Mr. Marconi's magnetic detector, which, though it has not been much used for the purpose, appears to be eminently suited for installations where great sensibility is not required.

Unlike most other pieces of apparatus used in radio-telephony, the thermionic valve is as useful in receiving as in transmitting. Receiver currents are usually very small, so receiving valves are generally much smaller than those used for transmission; but if only small power is required for transmission, the same valve may serve both purposes. In receiving gear the valve may perform several functions, since it may be used as a rectifier, as an amplifier, or for the production of high frequency current.

Rectification, that is to say, the conversion of

alternating current into current in one direction, may be done by connecting to the filament and to one cold electrode, as has been pointed out in Chapter V., but this method is not efficient and is hardly used nowadays. A better way is to connect the receiving circuit to the grid and filament of the valve, and put the telephones in the plate circuit. Fig. 19 shows a suitable arrangement. In this a high resistance ( $R$ ) of, say, one megohm, is connected between the grid and filament, and is

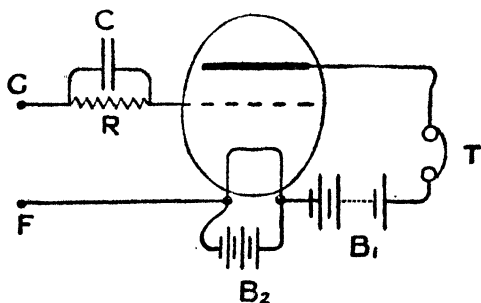


FIG. 19.—VALVE DETECTOR FOR CONNECTION TO RECEIVING CIRCUIT.  
T, Telephones;  $B_1$ , Main Supply; G, F, Terminals.

shunted by a small condenser to allow high frequency current to reach the grid without passing through the resistance. As the received alternating current arrives at the grid, it becomes alternately positive and negative. While positive, it attracts electrons into itself, and thus gains a negative charge, which only leaks off slowly through the high resistance ( $R$ ) (the "grid leak"). The plate current is reduced as the grid becomes negative, and its change causes a movement of the telephone diaphragm, which is roughly proportional to the charge

on the grid and therefore to the size of the incoming waves. The diaphragm thus reproduces the movements of the microphone in the transmitter, and emits sound waves which are replicas of those spoken into it.

The fact that any change in the voltage on the grid produces a larger change in that on the plate makes it possible to use a valve as a magnifier or amplifier, and if several be connected in series, so that the plate current of the first controls the grid voltage of the second, and so on, a very large magnification may be obtained. Each valve may magnify about ten times; thus two may give a magnification of one hundred times, three of one thousand times, and so on, but not *ad infinitum*, for there is a limit, depending on the total rate of emission of electrons from the filament to the current which any given valve will carry. However, it is not difficult to magnify the voltage of a signal at least one hundred thousand times.

There are various ways in which the change in the plate current of one valve may be applied to the grid of the next. In what is usually called a "resistance" amplifier, for instance, a resistance of at least several thousand ohms, is connected in series with the supply lead to the plate, to which the grid of the second valve is also connected through a condenser. As the resistance ( $R$ ) is in series with the plate, any drop of current in the valve means a drop of current, and therefore also of voltage (in  $R$ ), and this is transmitted by the condenser to the grid. Fig. 20 shows an amplifying unit

made on this principle, and a combination of several of these units will form an amplifier.

There are other methods of coupling valves in series to form an amplifier; for instance, the coupling may be a transformer, that is to say, a coil of wire in the one circuit wound close to a coil in the other. As the current in the first varies, the variation of its magnetic lines causes a variation of voltage in the other, through which they are looped. A transformer coupling, therefore, transmits variable but not steady currents, acting

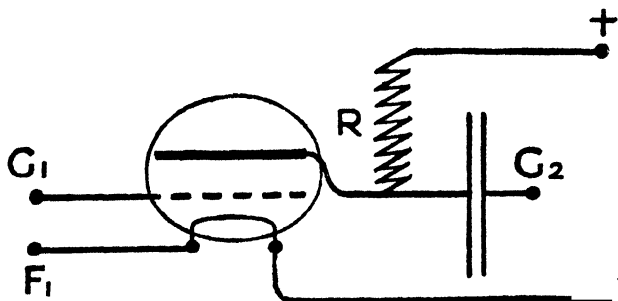


FIG. 20.—RESISTANCE AMPLIFIER.  $G_1$ ,  $F_1$ , Connections to Detector;  $G_2$ , to Grid of second Valve.

in this respect like a condenser. Fig. 21 shows a usual form of transformer amplifier. If the amplifier is for the magnification of currents of radio-frequency, no iron is used in its construction; but if for currents of speech or "audio" frequencies, the coils are wound on a laminated iron core. The reason for the omission of the iron core in the first case is that the magnetism of the iron is unable to follow the extremely rapid reversals of the radio-current. Otherwise iron is useful, as it increases the magnetic effect of a current.

A loud-speaking telephone is a useful adjunct to any receiving set which is to be used for the reception of radio-telephony, as by its use a number of people may hear the messages simultaneously without the discomfort of wearing head-receivers. Even the addition of a trumpet, such as is commonly used on a gramophone, to an ordinary telephone greatly increases the sound given out, probably because the column of air in it resonates, and so renders the action of the telephone diaphragm more efficient. If in addition to the trumpet

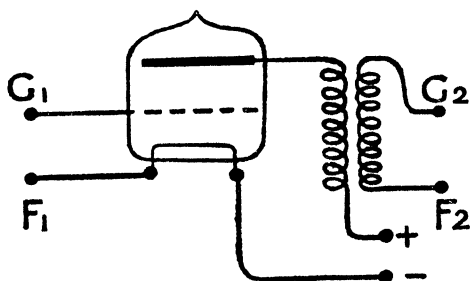


FIG. 21.—AMPLIFIER UNIT WITH TRANSFORMER COUPLING.  $G_1$ ,  $F_1$ , Terminals connected to Detector;  $G_2$ ,  $F_2$ , Grid and Filament of next Valve.

a type of telephone is used which can deal with much larger currents than the usual instrument is designed to carry, speech may be magnified so greatly that it is clearly audible to thousands of people in a large hall or even in the open air. In the spring of 1919 the author, as chief experimental wireless officer of the Royal Air Force, gave a demonstration to the Institution of Electrical Engineers, and later to the Houses of Parliament, of the use of radio-telephony for

communication with aircraft. The voice of the observer in the aeroplane was clearly audible to the whole audience in both cases, and long conversations were carried on between ground and air, which included a spoken invitation by the Secretary of State for Air, Major-General J. E. B. Seely, to the pilots and observers to dine with him at the House of Commons that night, and its acceptance. In these tests an extra amplifier was used which had larger valves and higher supply voltage than the ordinary one to which it was connected. The loud-speaking telephone was capable of dealing with the large current given by this amplifier.

Good amplification can also be obtained, without thermionic valves, by the use of a microphonic relay of the type produced by S. G. Brown.

*Notes on using a receiving set.*—Remember that the filament of your valve will either burn out or lose its power of emitting electrons if you put on more voltage than it is intended to stand. This means that you must not have more than two accumulator cells in series with a filament meant to take four volts, unless you have sufficient extra resistance in the circuit. The filaments of valves are usually made of the metal tungsten, mixed with a little thorium to increase the emission of electrons. The thorium may be driven off by overheating the filament, in which case the emission of electrons will become slower and the valve will be less sensitive.

Reaction between the grid and plate circuits is useful for strengthening signals when it is well under control, but when excessive it is the cause of many troubles.

For instance, you cannot hear speech if the valve circuit is oscillating, although you may hear morse signals quite well. A prolonged squeal is due to unintended oscillations, which may be caused by a break in the circuit, a loose terminal, or a too close coupling between the circuits owing to the wires being too near one another.

If you use a crystal as rectifier, remember that it has good and bad spots on it; the latter are more easily found. When you have found a good spot leave the detector alone, particularly if you have friends in. A crystal rectifier with a valve amplifier makes a very good combination; you may, or may not, get better signals by using a valve instead of the crystal.

Many electrical instruments work better when you hit them, but this does *not* apply to valves. You may swear, though a really bad case is far past swearing, but don't resort to force.

Remember that almost every trouble is due to a bad connection somewhere. Sometimes it is necessary to open out one of the split pins on a valve in order that it may make good contact with the socket. If you have to do it, do it gently with a thin knife-blade.

Dry cells are deceptive, for if they get really dry, as they usually do in a few months whether you use them or not, they cease to function. The best cells for the plate supply are small wet cells of the Leclanché type.

Keep your accumulators properly charged. Even when not in use they should be put on charge once a fortnight to keep them alive.



## CHAPTER IX.

### ACHIEVEMENTS AND EXPECTATIONS.

ALTHOUGH the transmission of speech by Dr. Graham Bell's photophone, in 1878, was wireless, the method even in its most recent form does not compare favourably with electric wireless transmission. All the difficulties of searchlight signalling are present, and atmospheric conditions play so important a part as to render vain all hopes of developing a really reliable system of telephony on this principle. It may form a useful adjunct where searchlights are used for other purposes, but cannot take the place of an electric telephone whether wire or wireless.

Mr. Ruhmer's experiments on the Havel, near Potsdam, no doubt showed that speech could be transmitted over several miles, both by night and day, and even in rainy weather, but the essential difficulty is, of course, that the country between the stations must be perfectly open so that the beams of light from the searchlights may strike direct on the receiving mirrors containing the selenium cells.

This difficulty would not arise over moderate distances at sea, but there, again, another exists, viz., the difficulty of directing the beam on to the receiver in spite of the rolling of the vessel on which the transmitter is placed. The photophone, even in its most

modern form, cannot, therefore, compete with electric wireless telephony.

It was in the last year of last century that the first experiments in radio-telephony were carried out, but it was not until four or five years later that an apparatus was evolved which was capable of transmitting speech clearly and distinctly to a distance of ten miles or more. It was thus about eighteen years ago that wireless telephony entered the arena of everyday life as a practicable means of communication, though even now but few people are aware that the voice can be transmitted without wires so as to be audible in a receiver several thousand miles away. Such a distance has, however, actually been covered, and there is no apparent limit to its extension to all terrestrial ranges. These achievements are worth consideration in some detail, for though they do not mark, like the conquest of the air, an era in the world's history, they do indicate a very important step in that progressive annihilation of distance which nowadays renders social and business intercourse possible over thousands of miles of sea and land.

It is hardly realised by the majority of people what an immense change has taken place in the life of the world on account of the wonderful increase in the facility and rapidity of intercourse, whether by telegraph or by travel, which has been made in the last half century. In the case of our own Empire this development is of supreme importance, since the Empire consists of fragments, large and small,

scattered over the whole surface of the globe. It is no longer banishment for life to go to one of the far distant dominions overseas, and every invention which tends to render intercommunications cheaper and more rapid is of far greater value to us than to any other country.

The Imperial Press Conference has done much to impress this fact upon the nation, but it cannot be too strongly insisted upon that the essence of national life is personal intercourse; intercourse between the members of a family scattered throughout the empire, as most families are, forms a series of links in the vast network of community of thought and interest which binds the whole together. Press messages are immensely useful in their way, but without personal communications—the letters, telegrams, and telephone messages of friends and relatives—they are as an egg without salt, substantial but uninviting, facts without living interest.

Many of us who have been absent some hundreds of miles from home during a time of trouble or anxiety, know the extraordinary satisfaction of hearing the actual voice of a loved one replying to one's anxious enquiries. It is the extension of this to thousands of miles instead of hundreds; indeed, possibly to all parts of the globe, whether sea or land, that is indicated by the actual present achievements of wireless telephony, and may be legitimately expected within the lifetime of most of us.

The story of Professor Fessenden's experimental development of a practical wireless telephone system

is told in an interesting paper which he read before the American Institute of Electrical Engineers, in June, 1908. The writer describes the gradual evolution, commencing in 1900, of a wireless telephone from a wireless telegraph by the introduction of modifications rendered necessary by the physical laws which govern the transmission of articulate speech, and the satisfactory conclusion to which the experiments were brought in the demonstration of practical wireless telephony to the editor of the American Telephone Journal and other technical men, is proved by the reports which they have published.

The demonstration was between Brant Rock and Plymouth, in the State of Massachusetts, a distance of about eleven miles. It was shown that speech could be transmitted not only directly from one wireless station to the other, but also that a wireless section could form part of any line of telephonic communication. Thus the voice was transmitted over any ordinary telephone line to a wireless station, where it was automatically transformed into radiations which were received at the other wireless station and again converted into currents which reproduced the voice at the end of a second line wire. In recent years these experiments have been repeated on a much larger scale by Professor Fessenden and by other experimenters, and the results obtained fully confirm his earlier conclusions.

Now, all this shows that the trunk connection between two local exchanges may be wireless, and,

therefore, that a subscriber on the one exchange will be able to converse with any subscriber on the other, although there is no trunk wire between them. This statement implies more than appears on its surface, for it indicates the provision of telephonic connections between exchanges where no such connection is possible by wire.

Speech can be transmitted by wire over land to a distance of between two and three thousand miles, but across the sea, by submarine cable, the maximum is little greater than one hundred miles. Hence, over sea, as shown by Professor Majorana's results, quoted on page 21, wireless telephony long since outdistanced the cable, and speech has become possible at much greater distances than heretofore. Indeed, there is every reason to believe that where wireless telegraphy leads, wireless telephony will always be able to follow and that speech will be possible across the Atlantic and every similar stretch of sea. Then when we ask for "Trunks" we shall be able to say, "Give me 977 Toronto," or "459 Bombay," and in a few minutes will be told that we are "through."

The advantages of telephony over telegraphy are two in number:—Firstly, the rapidity with which an answer can be got to a question; and secondly, the very much greater number of words which can be dealt with in a given time by one operator. It is quite easy to get answers to ten or a dozen questions arising successively out of one another in the course of a three minutes' conversation on the telephone, at a cost of a

very few pence. To have carried out the same conversation by telegraph would, under ordinary circumstances, have occupied from ten to twelve hours, and would cost over twenty shillings.

The actual number of words which one person can transmit per minute is also much greater in telephony, it being quite easy to speak at two hundred words per minute, while in telegraphy the highest speed attainable, even by an expert operator, is less than fifty. The modern "high speed" systems of telegraphy, of which so much has been heard recently, do not appreciably increase the speed at which an operator can work, but merely add to the carrying power of the wire.

The cost of the transmitting operator's salary, per word, remains the same, the only economy effected being in the number of wires used, and to some extent in number of receiving operators, and this, in the case of ordinary short land-lines, can only affect a small fraction of the total expense. Telephony, in which the only expert operator required can deal with a considerable number of simultaneous conversations, is, therefore, far less costly.

Wireless telephony has the further advantage that it is possible for a number of people in different places far apart, to take part in a general conversation, just as they would do in a drawing-room, everyone hearing what any of the others may say. Both at sea and on land this opens up new possibilities.

Wireless telephony has been successfully developed by Mr. Poulsen, the Telefunken Company, the T.Y.K.

of Japan, and many others. The first demonstration in England was one given by the author during a popular lecture at University College, Nottingham, early in 1908, at the request of the Vice-Principal, Mr. W. H. Heaton. A small Poulsen arc was used in conjunction with condensers and other apparatus made to the author's requirements in the College laboratories under the able direction of Mr. A. H. Simpson. Speech was transmitted from a room at the back of the large College building to one at the front, through many walls, iron pipes, and other obstacles, without difficulty.

Later in the same year Dr. de Forest gave a demonstration to the Navy, at Portsmouth, in which telephony was successfully carried on up to a distance of over forty miles between H.M.S. "Vernon" and a cruiser detailed for the purpose. Twenty-eight ships of the American Navy had previously been fitted with similar apparatus which they carried with them on their voyage round the world.

During the war the British and American Air Services made great progress in the development of radio-telephony, and in its application to war. Since the conclusion of peace the production of military instruments has of course nearly ceased, although the radio-telephonic gear used in civil aircraft strongly resembles some of the sets constructed during the war. Since 1919, however, a new field has been found for the use of radio-telephony, in the broadcasting of commercial and news messages.

It has been obvious from the beginning that radio-messages could be picked up by any receiver within range, but the commercial possibilities entailed in this property were not fully realized until lately. Broadcasting of news by radio-telegraphy has been in daily operation for years, as every one who has crossed the Atlantic knows, but telegraphy requires a skilled operator for its reception, and is slow compared with telephony. Radio-telephonic broadcasting, on the other hand, requires little skill in reception; indeed, with a simple receiver, there is practically nothing to be done beyond switching on the current, and even a child can make the small adjustments that may be necessary from time to time. In the United States the development of broadcasting has been extraordinarily rapid. News, advertisements, and children's stories are radio-phoned daily from dozens of powerful stations throughout the country, and hundreds of thousands of receiving sets have been sold and installed in private houses and public buildings. Indeed, the ether is now so full of waves that the government has had to take steps to reduce the pandemonium by the introduction of restrictive laws, in order to prevent other radio communications being jammed by the broadcasting stations. In this country we have the habit of making the restrictions first, and expecting the traffic to come later, and as yet the amount of broadcasting is not great. One can, however, receive music from Holland and from one or two British stations, also weather reports, and some general news from Paris. It is hoped that



a more comprehensive programme will shortly be arranged, but this depends on the mutual agreement of the various companies concerned, and not on governmental delay, since permission has already been given.

Thus wireless telephony is an accomplished fact, and when we consider that in forty years the number of telephone subscribers in the world has grown from nil to a vast total of several millions, it is clear that this means of electric communication fulfils the needs of everyday business and social life far more perfectly than the telegraph ; so much so, indeed, that the total number of words conveyed daily by telegraph is now only a very small fraction indeed of those transmitted by telephone. The telegraph, however, retains its place on account of its greater accuracy, and telephony will have to be very much more perfect than it is at present before it renders telegraphy obsolete.

With the advantages of telephony so amply proved by this enormous and ever increasing traffic, it is clear that radiotelephony ;—which renders telephony possible where it is impossible by wire, and obviates the difficulties of maintenance and cost of wayleaves unavoidable with a system of wires ;—will play, from now onwards, a part of immense importance in the intercourse of all civilised communities.

---

# Glossary of Technical Words.

**Alternator.** A machine which, when driven by a steam engine or other source of power, produces an alternating electric current, i.e., causes electricity to move to and fro in a conductor.

**Arc.** The very hot flame caused by the passage of a current of electricity through air or other gas.

**Battery.** An apparatus for producing steady, or direct, current always in one direction, from the chemical action of some liquid on two plates of different materials.

**Capacity.** (Electrical) Depends on the size and shape of the conductor, and on the nature of the insulator by which it is surrounded. Capacity measures the amount of electrical charge that can be forced on to the conductor when any given electric pressure (or voltage) is applied.

**Choking Coil.** A coil of many turns of wire wound on an iron core, and thus having great inductance. As a large amount of magnetic force is produced by a small change in the current, the choking coil tends to prevent change of current (see "Inductance").

**Condenser.** An instrument consisting essentially of conducting plates placed near together so as to give considerable capacity.

**Conductor.** A material which guides or conducts an electric current or wave. The commonest and best are the metals, among which copper is most generally used; carbon and also salt solutions and acids conduct, though not as well as the metals. Glass and non-metallic substances conduct extremely badly, and are usually called non-conductors.

**Current.** A current can be recognised by the fact that magnetic force is produced all round it even when flowing through an otherwise quite non-magnetic material, such as copper, and by the fact that a wire which is conducting a current becomes warm. If the current is of very short duration, special apparatus is needed, such as a coherer or other detector.

**Diaphragm.** A thin flexible disc.

**Dimensions.** The electrical dimensions of a conductor are the measurements on which its electrical properties depend. These measurements cannot, as a rule, be made with an inch tape, but involve measurements of quantities of electricity.

**Direct Current.** An electric current always flowing in the same direction but not necessarily always of the same strength. It can be measured by instruments which depend on either the magnetic force or heat which it produces.

**Dynamo.** A machine which, when driven by an engine, causes electricity to move round a conducting circuit. There are dynamos which produce direct current, and others which produce alternating current (see p. 30).

**Electrode.** A conductor. Usually applied to a metal or carbon conductor which leads a current to a spot where the current has to pass through a gas or liquid.

**Energy.** The power of doing physical work.

**Frequency.** Number of complete to and fro movements, or vibrations, per second. For electric currents, 100 per second is a low frequency, 100,000 per second a high frequency. *Audio* frequencies run from 30 to 10,000 per second, and *Radio* frequencies from 10,000 upwards.

**Inductance.** Work has to be done to start a current in a conductor because work has to be stored as energy in the magnetic force all round the conductor. When the current is being stopped this energy keeps on driving the current forward till the energy is used up. The amount of energy stored as magnetic force depends on the shape of the wire (i.e., whether straight or coiled up). The inductance of the wire depends on the same things. Inductance in a circuit acts like a fly-wheel on an engine, making it harder to start and harder to stop the current.

**Induction (Electrical).** Electrical action through a non-conductor, i.e., through air, glass, etc.

**Inertia.** Is the quality of matter in virtue of which it tends to remain at rest or to go on moving uniformly in a straight line; it is simply proportional to weight.

**Insulated.** A conductor is insulated when it is separated from all other conductors by non-conducting materials.

**Magnetic Force.** The force which tends to move a magnet.

**Molecule.** A quite invisibly small particle of matter, consisting of several atoms; the little bricks out of which ordinary materials are built.

**Musical Arc.** Mr. Duddell found that an electric arc could be made to sing by connecting a circuit having certain capacity and inductance to it. Change in the amount of the capacity or of the inductance changes the note. The musical arc produces electrical vibrations (alternating currents) as well as sound vibrations.

**Ohm.** The name of the unit of electrical resistance.

**Oscillation.** A to and fro movement.

**Period.** The time taken for a complete oscillation.

**Photophone.** Dr. Graham Bell's photophone transmits sound as the flickering of a beam of light reflected from a thin metal disc, which vibrates when spoken to, and thus causes the beam to flicker in time with the sound waves. At the receiver the beam strikes on a small piece of selenium, through which a current is made to flow by a battery. The selenium has the property that the brighter the light on it the more easily does the current flow; so the current is controlled by the flickering of the beam, and therefore reproduces the original sound in the telephone attached.

**Pitch.** Musical pitch is high when there are many vibrations per second (say 300 and upward), and low when few vibrations per second. The lowest audible note has about 30 per second, and the highest about 30,000 per second.

**Resistance.** Electrical resistance measures the value of a material as a conductor. Good conductors have low resistance and bad ones high resistance. More electrical pressure is required to drive a given current through a bad than through a good conductor of the same size.

**Voltage.** Electrical pressure, *i.e.*, that which drives a current.



# INDEX.

	PAGE		PAGE
Aerial Conductor, Marconi's		Electrolytic Detector	62
Clifden ... ..	27	Erskine-Murray, Dr. J., De-	
Aerial Wires ... ..	48	monstration at Notting-	
Air Waves, Photograph of ...	6	ham ... ..	76
Alternating Current Dynamo	30		
Antenna ... ..	48	Faraday's Discovery of Dy-	
Arc ... ..	34	namo ... ..	30
Arc generator of high fre-		Fessenden, Professor R. A.	
quency current ... ..	38	12, 14, 30, 72	
Armature of Dynamo ... ..	32	Hertz, Professor Heinrich ...	24
Atmospheric absorption ...	50	Hertzian Waves ... ..	24, 26
		High Frequency, Definition	29
Bell, Dr. Alexander Graham	17	Hughes, Professor D. E. ...	19
Boys, Mr. C. Vernon, Pho-		Hughes' Microphone...	3, 19
tograph of air waves ... ..	6		
Broadcasting ... ..	77	Inductance, like Inertia ...	38
Brown, S. G. ... ..	68	Insulator, The Functions of	
Bullet, Photograph of flying	6	an ... ..	23
Capacity, Electric ... ..	38	Kelvin, Lord ... ..	54
Clerk-Maxwell, Prof. James	24		
Compression waves ... ..	3	Lepel, Baron Egbert von	
		16, 35, 36	
De Forest, Dr. Lee ... ..	15, 63, 76	Loudness of Sound ... ..	7
Detectors ... ..	61		
Detector, De Forest's ... ..	63	Magnetic Detector, Marconi's	63
„ Electrolytic ... ..	62	Majorana, Professor Quinto	
„ Marconi's Magnetic	63	14, 21, 74	
„ Rectifying ... ..	61	Marconi, Senator Guglielmo	
„ Thermo-Electric ... ..	61	11, 16, 27, 35, 50, 63	
Distance of Transmission,		Microphone or Transmitter	
maxima with wires and		3, 19, 44	
wireless ... ..	71	Microphone, Majorana's Hy-	
Duddell, Mr. William ... ..	15	draulic ... ..	21
Dynamo, Principle of ... ..	30	Musical Arc, Duddell's ...	15

	PAGE		PAGE
Musical Note, Pitch of ...	5	Superposition of Small Mo-	
Organ Pipe ... ..	32	tions ... ..	54, 56
Photophone ... ..	11, 25, 70	Swing, Action of ... ..	54
Piano, Resonance of ...	55	Telefunken Company ...	15
Poulsen, Mr. Valdemar ...	15, 35	Telegraphy, "High speed" ...	75
Press Conference, Imperial ...	72	Telephone, Bell's ...	18
Press Messages ... ..	72	Telephones, First in Europe	17
Rarefaction, Wave of ...	4, 5	Telephony compared with	
Receiving Instruments ...	50	Telegraphy ... ..	72
Rectifying Detector ...	61	Tesla, Arc in Hydrogen ...	35
Resistance, Variable, of air		Thermo-electric Detector ...	61
gap ... ..	34	Thomson, Elihu ... ..	14
Resonance, Principle of,		Transformer ... ..	46
applied to Wireless ...	58	Trunk Connexion, Wireless	73
Royal Air Force ... ..	67	Valve, Thermionic ... ..	39
Ruhmer, Mr. Ernst ... ..	15	" H.F. Current Genera-	
Seely, Maj.-Gen. ... ..	68	tor ... ..	39, 42
Sound of a Band ... ..	2	" Grid of ... ..	41
Sound, Character of ... ..	10	" Plate of ... ..	40
" Complex ... ..	2, 10	" Telephone Transmit-	
" Loudness of ... ..	7	ter ... ..	46
" Motion of Wave of ...	4	" Detector ... ..	63
" Physical Cause of ...	3	" Amplifier ... ..	66, 67
" Pitch of ... ..	7	" Notes on use of ...	68
" Quality of ... ..	7	Violin, Analogous to Arc	
" Transmission of ...	1	Method ... ..	36
Sound Wave, Speed of ...	5	Vowel Sounds ... ..	8
		Zenneck, Dr. J., on Trans-	
		mission ... ..	49

A SHORT-TITLE LIST OF  
SCIENTIFIC, TECHNICAL  
AND INDUSTRIAL BOOKS

(INCLUDING GENERAL EDUCATION)

PUBLISHED BY

CROSBY LOCKWOOD & SON

(C. M. LOCKWOOD)

7 STATIONERS' HALL COURT, LONDON, E.C. 4

*Telegrams*

CROSBY LOCKWOOD, CENT, LONDON

*Telephone*

4421 CENTRAL

POST FREE ON APPLICATION

COMPLETE DETAILED CATALOGUE

ALSO

LIST OF BOOKS IN ORIENTAL LANGUAGES

AND

PUBLICATIONS OF THE BRITISH ENGINEERING  
STANDARDS ASSOCIATION

---

NOTE—*The prices herein quoted are subject to revision  
without notice*

JANUARY 1923



A SHORT-TITLE LIST OF  
**SCIENTIFIC, TECHNICAL AND  
 INDUSTRIAL BOOKS**

PUBLISHED BY

**CROSBY LOCKWOOD & SON**

<b>Acetylene Lighting.</b>	Gibbs. Crown 8vo . . . . .	10s 6d
<b>Aerial Navigation.</b>	Dumbleton. Demy 8vo . . . . .	12s 6d
<b>Aerial or Wire-rope Ways.</b>	Wallis-Taylor. Demy 8vo . . . . .	12s 6d
<b>Aeroplane Construction.</b>	Camm. Demy 8vo . . . . .	7s 6d
<b>Agricultural Arithmetie.</b>	Newsham. Crown 8vo . . . . .	5s
<b>Agricultural Facts and Figures.</b>	M'Connell. Fcap. 8vo . . . . .	15s
<b>Agricultural Geology.</b>	M'Connell. 8vo . . . . .	21s
<b>Agricultural Surveyor's Handbook.</b>	Bright. Fcap. 8vo . . . . .	8s 6d
<b>Agricultural Tenancies.</b>	Curtis and Gordon. Demy 8vo . . . . .	10s 6d
<b>Agricultural Valuer's Assistant.</b>	Bright. Crown 8vo . . . . .	7s 6d
<b>Agriculture.</b>	Wrightson and Newsham. Med. 8vo . . . . .	12s 6d
<b>Air Screws.</b>	Riach. Demy 8vo . . . . .	10s 6d
<b>Aircraft Identification Book.</b>	Matthews. Fcap. 8vo . . . . .	3s 6d
<b>Alphabets, Ancient.</b>	Delamotte. Oblong Royal 8vo . . . . .	6s
<b>Alphabets, Modern.</b>	Delamotte. Oblong Royal 8vo . . . . .	6s
<b>Alphabets and Initials, Mediæval.</b>	Delamotte. Small 4to . . . . .	6s
<b>Alternating Currents.</b>	Larner. Crown 8vo . . . . . <i>New Ed. Nearly Ready</i>	
<b>Alternating Currents.</b>	Kempe. Crown 8vo . . . . .	4s 6d
<b>Aluminium Repairing.</b>	Platt. Crown 8vo . . . . .	3s
<b>Architectural Perspective.</b>	Ferguson. 8vo . . . . .	5s
<b>Architecture, Mechanics of.</b>	Tarn. Crown 8vo . . . . .	8s 6d
<b>Arithmetic, Revision.</b>	Thomas. Crown 8vo . . . . .	2s 6d
<b>Asphalts and Allied Substances.</b>	Abraham. Demy 8vo . . . . .	42s
<b>Assaying, Gold.</b>	Phillips. Large Crown 8vo . . . . .	8s 6d
<b>Astronomical Glossary.</b>	Gore. Small Crown 8vo . . . . .	3s 6d
<b>Auctioneers : their Duties and Liabilities.</b>	Squibbs. Demy 8vo . . . . .	15s
<b>Aviation A. B. C.</b>	Pagé. Medium 8vo . . . . .	15s
<b>Aviation Pocket Book.</b>	Matthews. Crown 8vo . . . . .	12s 6d
<b>Aviation Engines.</b>	Pagé. Medium 8vo . . . . .	18s
<b>Aviation Terms (Glossary of).</b>	Pagé and Montariol. Cr. 8vo . . . . .	6s
<b>Aviation Chart.</b>	Pagé. Pocket-size . . . . .	2s 6d
<b>Bacon Curing : Art of.</b>	Davies. Crown 8vo . . . . . <i>Nearly Ready</i>	
<b>Beams : Experiments on.</b>	Guy. Medium 8vo . . . . .	9s
<b>Bee-Keeping : Every Step in.</b>	Douglass. Large Crown 8vo . . . . .	6s
<b>Bees for Pleasure and Profit.</b>	Samson. Crown 8vo . . . . .	3s 6d

*All Published Prices are net.*

<b>Blast Furnace Calculations.</b> Stevenson. Fcap. 8vo . . . . .	6s
<b>Blowpipe in Chemistry, Mineralogy, &amp;c.</b> Ross. Crown 8vo . . . . .	6s
<b>Boiler Construction.</b> Hutton. Medium 8vo . . . . .	21s
<b>Boiler and Factory Chimneys.</b> Wilson. Crown 8vo . . . . .	4s
<b>Boiler Making and Plating.</b> Horner. Large Crown 8vo . . . . .	12s 6d
<b>Boilers: The Lancashire Boiler.</b> Wansbrough. Demy 8vo . . . . .	6s
<b>Boilers.</b> Wilson. 12mo . . . . .	6s
<b>Boilers, Economisers and Superheaters.</b> Smith. Demy 8vo . . . . .	9s
<b>Boot Repairing.</b> Lawrence-Lord. Crown 8vo . . . . .	5s
<b>Bread and Biscuit Baker's Assistant.</b> Wells. Crown 8vo . . . . .	2s
<b>Breakfast Dishes.</b> Miss Allen. Fcap. 8vo . . . . .	1s 6d
<b>Brewing.</b> Wright. Large Crown 8vo . . . . .	15s
<b>Bricks and Tiles.</b> Dobson and Searle. Crown 8vo . . . . .	7s 6d
<b>Bridge Construction in Cast and Wrought Iron.</b> Humber. 4to . . . . .	£6 16s 6d
<b>Bridges, Oblique.</b> Watson Buck. Royal 8vo . . . . .	12s 6d
<b>Builders' Accounts.</b> Keen. Crown 8vo . . . . .	5s
<b>Builders' Calculator.</b> Smith. 7" x 3" . . . . .	2s 6d
<b>Building Construction.</b> Allen. Medium 8vo . . . . .	9s
<b>Building Inspection.</b> Purchase. Crown 8vo . . . . .	3s 6d
<b>Building: Art of.</b> Allen. Crown 8vo . . . . . <i>New Edition Nearly Ready</i>	
<b>Building—Every Man His Own Builder.</b> Samson. Demy 8vo . . . . .	15s
<b>Bungalow Residences.</b> Harrison. Demy 8vo . . . . .	7s 6d
<b>Cabinet Maker's Guide.</b> Bitmead. Crown 8vo . . . . .	3s 6d
<b>Calculator, Number, Weight and Fractional.</b> Chadwick. 8vo . . . . .	25s
<b>Calculator (Weight).</b> Harben. Royal 8vo . . . . .	£1 5s
<b>Carburation.</b> Brewer. Demy 8vo . . . . . <i>New Ed. Preparing</i>	
<b>Carburettors: Gasolene and Kerosene.</b> Pagé. Crown 8vo . . . . .	12s
<b>Carpentry and Joinery.</b> Tredgold. Crown 8vo . . . . .	6s
<b>Chemical Analysis (Standard Methods of).</b> Scott. Royal 8vo . . . . .	52s 6d
<b>Chemistry (Applied).</b> Tinkler and Masters. Medium 8vo . . . . .	12s 6d
<b>Chemistry (The Elements of).</b> Bassett. Crown 8vo . . . . .	6s
<b>Chemistry for Army and Matriculation Candidates.</b> Martin. Crown 8vo . . . . .	2s 6d
<b>Chemical Technology (Manuals of).</b> Edited by Martin. Royal 8vo . . . . .	
I. Dyestuffs and Coal-Tar Products . . . . .	9s
II. The Rare Earth Industry . . . . .	9s
IV. Chlorine and Chlorine Products . . . . .	9s
V. Sulphuric Acid and Sulphur Products . . . . .	9s
VI. The Salt and Alkali Industry . . . . .	9s
VII. Industrial Gases . . . . .	9s
VIII. The Minor Elements . . . . . <i>In Preparation</i>	
IX. Oils, Fats and Waxes . . . . .	12s 6d
X. Perfumes, Essential Oils and Fruit Essences . . . . .	12s 6d
<b>Chemistry—Industrial and Manufacturing Chemistry: Part I.—</b>	
Organic. Martin. Royal 8vo . . . . .	£1 16s
<b>Chemistry—Industrial and Manufacturing Chemistry: Part II.—</b>	
Inorganic. Martin. Royal 8vo. In 2 Volumes. Per vol. . . . .	28s
<b>Civil Engineering Geology.</b> Fox. Royal 8vo . . . . .	18s

Civil Engineering Types and Devices.	Barber.	Demy 8vo	9s
Clerk of Works.	Metson.	Crown 8vo	8s 6d
Clock Repairing and Making.	Garrard.	Crown 8vo	6s
Coal and Iron Industries of the United Kingdom.	Meade.	8vo	21 8s
Coal Mining.	Glover.	Crown 8vo	2s
Coal Mining, Practical.	Cockin.	Crown 8vo	6s
Coal Mining Notes and Formulæ for Students.	Merivale.	Small Crown 8vo	3s 6d
Cocoanut Cultivation.	Coghlan and Hinchley.	Sm. Crown 8vo	4s
Coffee : Cultivation and Preparation.	Ugarte		<i>In Preparation</i>
Coking Practice.	Byrom and Christopher—		
Volume I. Raw Materials and Coke.	Demy 8vo		10s 6d
Volume II. By-Products.	Demy 8vo		10s 6d
Colliery Working and Management.	Bulman and Redmayne.		
	Medium 8vo		<i>New Ed. Preparing</i>
Colorimetric Analysis.	Snell.	Demy 8vo	10s 6d
Commerce, Lessons in.	Gambaro.	Crown 8vo	5s
Commercial Correspondent, Foreign.	Baker.	Crown 8vo	7s 6d
Compressed Air Work and Diving.	Boycott.	Medium 8vo	10s 6d
Concrete : its Nature and Uses.	Sutcliffe.	Crown 8vo	10s 6d
Concrete for House, Farm, and Estate.	Ballard.	Demy 8vo	3s 6d
Confectioner, Modern Flour.	Wells.	Crown 8vo	2s
Confectionery, Ornamental.	Wells.	Crown 8vo	7s 6d
Continuous Railway Brakes.	Reynolds.	8vo	9s
Controllers for Electric Motors.	James.	Demy 8vo	21s
Cotton Industry.	Crabtree.	Crown 8vo	6s
Creation, The Twin Records of.	Le Vaux.	8vo	5s
Curves, Tables of Tangential Angles and Multiples.	Beazeley.		5s
Dairying (British and Colonial).	Sutherland Thomson.	Demy 8vo	9s
Dairying Industry.	Sutherland Thomson.	Demy 8vo	10s 6d
Dampness in Dwelling Houses.	Blake.	Crown 8vo	<i>Nearly Ready</i>
Dangerous Goods.	Phillips.	Crown 8vo	10s 6d
Decorator's Assistant.		Small Crown 8vo	2s 6d
Deep-Level Mines of the Rand.	Denny.	Royal 8vo	25s
Dentistry (Mechanical).	Hunter.	Crown 8vo	6s
Diesel or Slow-Combustion Oil Engine.	Wells & Wallis-Taylor.	8vo	
			<i>New Ed. Preparing</i>
Drawing.	Pyne.	4to	8s 6d
Dredges and Dredging.	Prelini.	Royal 8vo	24s
Drilling for Gold and Other Minerals.	Denny.	Medium 8vo	12s 6d
Dynamics (Notes on).	Thomas.	Demy 8vo	6s
Dynamo (How to Make).	Crofts.	Crown 8vo	2s 6d
Dynamos (Alternating and Direct Current).	Sewell.	Lge. Cr. 8vo	7s 6d
Dynamos (Management of).	Lummis-Paterson.	Crown 8vo	8s
Earthenware, The Manufacture of.	Sandeman.	Crown 8vo	12s
Earthwork Diagrams.	Erskine-Murray and Kirton.	5s ; mounted,	7s 6d
Earthwork Manual.	Graham.	18mo	3s 6d
Earthwork Tables.	Broadbent and Campin.	Crown 8vo	6s

<b>Earthwork Tables.</b> Buck. On a sheet . . . . .	<b>3s 6d</b>
<b>Electric Light.</b> Urquhart. Crown 8vo . . . . .	<b>7s 6d</b>
<b>Electric Light Fitting.</b> Urquhart. Crown 8vo . . . . .	<i>Nearly Ready</i>
<b>Electric Light for Country Houses.</b> Knight. Crown 8vo . . . . .	<b>1s 6d</b>
<b>Electric Lighting and Starting for Motor Cars.</b> Cross Demy 8vo	
<i>New Ed. Nearly Ready</i>	
<b>Electric Lighting and Heating.</b> Walker. •Fcap. 8vo . . . . .	<b>5s</b>
<b>Electric Motors.</b> Crocker and Arendt. Medium 8vo . . . . .	<b>21s</b>
<b>Electric Power Conductors.</b> Perrine. Medium 8vo. . . . .	<b>21s</b>
<b>Electric Power Stations.</b> Klingenberg. Crown 4to . . . . .	<b>28s</b>
<b>Electric Power Station: A 130,000-Kilowatt Power Station.</b> Klingenberg. Crown 4to. . . . .	<i>Nearly Ready</i>
<b>Electric Ship-Lighting.</b> Urquhart. Crown 8vo . . . . .	<b>8s 6d</b>
<b>Electric Spark Ignition in Internal Combustion Engines.</b> Morgan. Medium 8vo . . . . .	<b>6s</b>
<b>Electric Traction and Transmission Engineering.</b> Sheldon and Hausmann. Large Crown 8vo . . . . .	<b>21s</b>
<b>Electric Wiring Diagrams and Switchboards.</b> Harrison. Crown 8vo . . . . .	<b>15s</b>
<b>Electrical Calculations (Elementary).</b> Sloane. Crown 8vo . . . . .	<b>15s</b>
<b>Electrical Circuits and Connections.</b> Bowker. Medium 8vo. . . . .	<b>15s</b>
<b>Electrical Dictionary.</b> Sloane. Large Crown 8vo . . . . .	<b>21s</b>
<b>Electrical Engineering (Elementary).</b> Alexander. Crown 8vo . . . . .	<b>5s</b>
<b>Electrical Engineering.</b> Sewell. Large Crown 8vo . . . . .	<b>7s 6d</b>
<b>Electrical Horology.</b> Langman and Ball. Crown 8vo . . . . .	<b>7s 6d</b>
<b>Electrical Installation Work.</b> Havelock. Demy 8vo . . . . .	<b>15s</b>
<b>Electrical Transmission of Energy.</b> Abbott. Royal 8vo . . . . .	<b>30s</b>
<b>Electrical Transmission of Energy—Three-Phase Transmission.</b> Brew. Demy 8vo . . . . .	<b>9s</b>
<b>Electrical and Magnetic Calculations.</b> Atkinson. Crown 8vo . . . . .	<b>12s</b>
<b>Electricity as Applied to Mining.</b> Lupton. Medium 8vo . . . . .	<b>12s 6d</b>
<b>Electricity in Factories and Workshops.</b> Haslam. Large Cr. 8vo . . . . .	<b>8s 6d</b>
<b>Electro-Plating.</b> Urquhart. Crown 8vo . . . . .	<b>7s 6d</b>
<b>Electro-Plating.</b> Watt. Crown 8vo . . . . .	<b>5s</b>
<b>Electro-Plating and Electro-Refining of Metals.</b> Watt and Philip. Large Crown 8vo . . . . .	<b>15s</b>
<b>Electro-Typing.</b> Urquhart. Crown 8vo . . . . .	<b>5s</b>
<b>Embroiderer's Book of Design.</b> Delamotte. Oblong 8vo . . . . .	<b>3s</b>
<b>Engineering Chemistry.</b> Phillips. Crown 8vo . . . . .	<i>New Ed. Preparing</i>
<b>Engineering Drawing.</b> Maxton and Malden. Crown 8vo . . . . .	<b>8s 6d</b>
<b>Engineering Estimates, Costs, &amp; Accounts.</b> A General Manager. 8vo	<b>9s</b>
<b>Engineering Progress (1863-6).</b> Humber. Imperial 4to, half morocco . . . . .	Price <b>£12 12s</b> ; each volume, <b>£3 3s</b>
<b>Engineering Workshop Handbook.</b> Pull. Royal 16mo . . . . .	<b>3s 6d</b>
<b>Engineer's Handbook (Practical).</b> Hutton. Medium 8vo . . . . .	<b>21s</b>
<b>Engineer's Measuring Tools.</b> Pull. Crown 8vo . . . . .	<b>4s 6d</b>
<b>Engineer's, Mechanic's, Architect's, Builder's, &amp;c., Tables and Memoranda.</b> Smith. Waistcoat-pocket size . . . . .	<i>New Ed. Preparing</i>
<b>Engineer's and Millwright's Assistant.</b> Templeton. 18mo . . . . .	<b>3s</b>

*All Published Prices are net.*

**Engineer's Year-Book.** Kempe. Crown 8vo . . . *Annually* 30s  
**Engineering Standards Association's Reports and Specifications.**

*Separate List on Application*

<b>English Literature, A Handbook of.</b>	Dobson. Crown 8vo . . .	5s
<b>Entropy as a Tangible Conception.</b>	Wheeler. Demy 8vo . . .	8s 6d
<b>Excavation (Earth and Rock).</b>	Prelini. Royal 8vo . . .	21s
<b>Explosives—High Explosives.</b>	Colver. Royal 8vo . . .	£3 3s
<b>Explosives—Nitro-Explosives.</b>	Sanford. Demy 8vo . . .	12s
<b>Factory Accounts.</b>	Garcé and Fells. Demy 8vo . . .	15s
<b>Farm Account Book.</b>	Woodman. Folio . . .	10s 6d
<b>Farm Gas Engines.</b>	Brate. Crown 8vo. . . . .	6s 6d
<b>Farmers' Tables and Memoranda</b>	Francis. Waistcoat-pocket size . . . . .	2s 6d
<b>Farmers' Labour and Account Book.</b>	Dalley. Fcap. Folio . . .	6s
<b>Farming, Practical.</b>	Shepherd. Demy 8vo . . .	5s
<b>Fertilisers and Feeding Stuffs.</b>	Dyer. . . . .	<i>New Ed. Preparing</i>
<b>Fertilizing Materials, Mining and Manufacture.</b>	Lloyd. Crown 8vo . . .	12s
<b>Fire Protection in Buildings.</b>	Holt. Demy 8vo . . .	9s
<b>Forcing Garden.</b>	Wood. Crown 8vo . . .	4s
<b>Foreshores.</b>	Latham. Crown 8vo . . .	2s 6d
<b>Forestry, Practical.</b>	Curtis. Crown 8vo . . .	6s
<b>Forestry : Complete Yield Tables for.</b>	Maw. Oblong . . .	7s 6d
<b>French Conversation, Guide to.</b>	De Fivas. 32mo . . .	2s 6d
<b>French Grammar : De Fivas' New Grammar of French Grammars</b>	. . . . .	2s 6d
<b>Key to the Above</b>	. . . . .	3s 6d
<b>French Grammar, Elementary.</b>	De Fivas. Crown 8vo . . .	1s 6d
<b>French Language : Introduction.</b>	De Fivas. Crown 8vo . . .	2s 6d
<b>Fretcutting, The Art of Modern.</b>	Makinson. Crown 8vo . . .	2s 6d
<b>Founders' Manual.</b>	Payne. Crown 8vo. . . . .	24s
<b>Fruit Growing.</b>	Douglass. Large Crown 8vo . . .	7s 6s
<b>Gas Engine, A Handbook on the.</b>	Haeder and Huskisson. 4to . . .	30s
<b>Gas Engine Handbook.</b>	Roberts. Crown 8vo . . .	12s 6d
<b>Gas Engineers' Pocket-Book.</b>	O'Connor. Crown 8vo. . . . .	12s 6d
<b>Gas Manufacture, Chemistry of.</b>	Royle. Demy 8vo . . .	16s
<b>Gas and Oil Engine Management.</b>	Bale. Crown 8vo . . .	3s 6d
<b>Gasfitting and Appliances.</b>	Briggs and Henwood. Crown 8vo . . .	6s
<b>Geometry of Compasses.</b>	Byrne. Crown 8vo . . .	3s 6d
<b>Geometry for Technical Students.</b>	Sprague. Crown 8vo . . .	2s
<b>Gold Extraction, Cyanide Process of.</b>	Eissler. 8vo . . .	8s 6d
<b>Gold, Metallurgy of.</b>	Eissler. Medium 8vo . . .	25s
<b>Gold Mining Machinery.</b>	Tinney. Medium 8vo . . .	12s 6d
<b>Gold Working : Jeweller's Assistant.</b>	Gee. Crown 8vo . . .	8s 6d
<b>Goldsmith's Handbook.</b>	Gee. Crown 8vo . . .	6s
<b>Granites and our Granite Industries.</b>	Harris. Crown 8vo. . . . .	3s
<b>Grazing. The Complete Grazier, and Farmer's and Cattle Breeder's Assistant.</b>	Youatt, Fream and Bear. Royal 8vo . . .	36s

*All Published Prices are net.*

<b>Hand Sketching for Mining Students.</b> Lodge and Harwood.	
Oblong Demy 4to . . . . .	10s 6d
<b>Handybooks for Handicrafts.</b> Hasluck. Crown 8vo.	
Metal Turner's Handybook . . . . .	1s 6d
Wood Turner's Handybook . . . . .	1s 6d
Watch Jobber's Handybook . . . . .	1s 6d
Pattern Maker's Handybook . . . . .	1s 6d
Mechanic's Workshop Handybook . . . . .	1s 6d
Model Engineer's Handybook . . . . .	1s 6d
Clock Jobber's Handybook . . . . .	1s 6d
Cabinet Worker's Handybook . . . . .	1s 6d
Woodworker's Handybook . . . . .	1s 6d
<b>Heat, Expansion of Structures by.</b> Keily. Crown 8vo . . . . .	4s
<b>History : Mediæval Heresy and the Inquisition.</b> Turberville.	
Demy 8vo . . . . .	10s 6d
<b>History : The Influence of the French Revolution in English</b>	
History. Brown. Demy 8vo . . . . .	8s 6d
<b>History : The Wars of the Roses, 1377-1471.</b> Mowat. Demy 8vo . . . . .	7s 6d
<b>Hoisting Machinery.</b> Horner. Crown 8vo . . . . .	8s 6d
<b>Horticultural Note-Book.</b> Newsham. Fcap. 8vo . . . . .	7s 6d
<b>Hot Water and Steam Heating and Ventilation.</b> King. Med. 8vo . . . . .	21s
<b>House Owner's Estimator.</b> Simon. Crown 8vo . . . . .	4s
<b>House Painting.</b> Davidson. Crown 8vo . . . . .	7s 6d
<b>House Planning—How to Plan a House.</b> Samson. Crown 8vo . . . . .	6s
<b>House Property.</b> Tarbuck. 12mo . . . . .	7s 6d
<b>Houses, Villas, Cottages, and Bungalows for Britishers and Americans</b>	
Abroad. Samson. Demy 8vo . . . . .	7s 6d
<b>Hydraulic Power Engineering.</b> Croydon Marks. 8vo . . . . .	12s 6d
<b>Illuminating and Missal Painting.</b> Whithard. Crown 8vo . . . . .	6s
<b>Illumination, Art of.</b> Delamotte. Small 4to . . . . .	7s 6d
<b>Inflammable Gas and Vapour in the Air.</b> Clowes. Crown 8vo . . . . .	6s
<b>Interest Calculator.</b> Campbell. Crown 8vo . . . . .	3s
<b>Internal Combustion Engines.</b> Carpenter. Medium 8vo . . . . .	38s
<b>Inwood's Tables for Purchasing Estates.</b> Schooling. Demy 8vo . . . . .	9s
<b>Iron and Metal Trades Companion.</b> Downie . . . . .	9s
<b>Iron Ores of Great Britain and Ireland.</b> Kendall. Crown 8vo . . . . .	18s
<b>Iron-Plate Weight Tables.</b> Burlinson and Simpson. 4to . . . . .	25s
<b>Irrigation (Pioneer).</b> Mawson. Demy 8vo . . . . .	12s 6d
<b>Jigs, Tools and Fixtures (Drawing and Design).</b> Gates. Crown 8vo. . . . .	8s 6d
<b>Journalism.</b> Mackie. Crown 8vo . . . . .	2s 6d
<b>Labour Disputes, Conciliation and Arbitration in.</b> Jeans.	
Crown 8vo . . . . .	2s 6d
<b>Land Valuer's Assistant.</b> Hudson. Royal 32mo . . . . .	4s 6d
<b>Lathe Design, Construction, and Operation.</b> Perrigo. Med. 8vo . . . . .	18s
<b>Lathe Work.</b> Hasluck. Crown 8vo . . . . . <i>New Ed. Nearly Ready</i>	
<b>Law : Every Man's Own Lawyer.</b> A. Barrister. Large Crown 8vo . . . . .	15s
<b>Lead, Metallurgy of.</b> Eissler. Crown 8vo . . . . .	15s

Leather Chemistry. Harvey. Demy 8vo . . . . .	15s
Leather Manufacture. Watt. 8vo . . . . .	15s
Letter Painting. Badenock and Prior. Crown 8vo . . . . .	2s
Levelling, Principles and Practice of. Simms. 8vo . . . . .	9s
Lightning Conductors, Modern. Hedges. Medium 8vo . . . . .	8s
Limes and Cements. Dancaster. Large Crown 8vo . . . . .	7s 6s
Liquid Fuels for Internal Combustion Engines. Moore. Demy 8vo . . . . .	15s
Lockwood's Builder's Price Book. Crown 8vo . . . . .	Annually 7s 6d
Locomotive Engine. Weatherburn. Crown 8vo . . . . .	3s 6d
Locomotive Engine Development. Stretton. Crown 8vo . . . . .	5s
Machine Shop Tools. Van Dervoort. Medium 8vo . . . . .	28s
Magnetos for Automobilists. Botton. Crown 8vo . . . . .	2s 6d
Marble and Marble Working. Renwick. Medium 8vo . . . . .	16s
Marble Decoration. Blagrove. Crown 8vo . . . . .	4s
Marine Engineer's Guide. Wannan and Lindsay. Lge. Crown 8vo. In 2 vols. . . . .	
Arithmetic . . . . .	New Ed. Preparing
Elementarys, Verbals, and Drawings . . . . .	New Ed. Preparing
Marine Engineer's Pocket-Book. Wannan. 18mo . . . . .	7s 6d
Marine Engines and Boilers. Bauer. Medium 8vo . . . . .	25s
Marine Gas Engines. Clark. Crown 8vo . . . . .	10s 6d
Marine Steam Turbines. Bauer. Medium 8vo . . . . .	12s 6d
Marine Works. Latham. Demy 8vo . . . . .	16s
Masonry. Purchase. Royal 8vo . . . . .	9s
Masonry Dams from Inception to Completion. Courtney. 8vo . . . . .	10s 6d
Measures (British and American). Foley. Folio . . . . .	8s 6d
Measuring and Valuing Artificer's Work. Dobson and Tarn. Crown 8vo . . . . .	8s 6d
Mechanical Engineering Terms (Lockwood's Dictionary of). Horner. Crown 8vo . . . . .	9s
Mechanical Engineer's Pocket-Book. Clark and Powles. Small 8vo . . . . .	7s 6d
Mechanical Handling and Storing of Material. Zimmer. Royal 8vo . . . . .	63s
Mechanics Condensed. Hughes. Crown 8vo . . . . .	2s 6d
Mechanics of Air Machinery. Weisbach. Royal 8vo . . . . .	25s
Mechanics' Workshop Companion. Templeton & Hutton. Fcp. 8vo . . . . .	7s 6d
Mensuration and Gauging. Mant. 18mo . . . . .	4s
Mercantile Calculation Tables. Kirchner. Demy 4to. . . . .	Nearly Ready
Metal Plate Work (Principles and Processes). Barrett. Crown 8vo . . . . .	3s 6d
Metal-Turning. Horner. Large Crown 8vo . . . . .	12s 6d
Metals and their Alloys. Vickers and Brann. Royal 8vo. . . . .	Nearly Ready
Metrology, Modern. Jackson. Large Crown 8vo . . . . .	12s 6d
Military Observation Balloons. Widmer. Crown 8vo . . . . .	16s
Milk and Cream Testing. Thomson and Lowe . . . . .	New Ed. Preparing
Milling Machines. Horner. Medium 8vo . . . . .	15s
Mine Drainage. Michell. Royal 8vo . . . . .	25s
Mine Rescue Work and Organization. Bulman and Mills. Demy 8vo . . . . .	12s
Mine Wagon and its Lubrication. Pamey. Medium 8vo . . . . .	7s 6d

*All Published Prices are net.*

<b>Mineral Property, The Valuation of.</b> O'Donahue. Demy 8vo	8s 6d
<b>Minerals and Mining (Earthy).</b> Davies. Crown 8vo	12s 6d
<b>Minerals and Mining (Metaliferous).</b> Davies. Large Crown 8vo	12s 6d
<b>Miners and Metallurgists, Pocket-Book for.</b> Power. Fcap. 8vo	7s 6d
<b>Miner's Handbook</b> Milne. Fcap. 8vo	7s 6d
<b>Mining, British.</b> Hunt. Super Royal 8vo	42s
<b>Mining Calculations.</b> O'Donahue. Crown 8vo	4s 6d
<b>Mining Examination Questions (1,200).</b> Kerr. Demy 8vo	2s 6d
<b>Mining, Physics and Chemistry of.</b> Byrom. Crown 8vo	6s
<b>Mining : Machinery for Metalliferous Mines.</b> Davies. Medium 8vo	25s
<b>Motor Car Catechism.</b> Knight. Crown 8vo	3s 6d
<b>Motor Car Construction.</b> Brewer. Demy 8vo	<i>New Ed. Preparing</i>
<b>Motor Cycle Overhauling.</b> Shepherd. Crown 8vo	2s 6d
<b>Motor Lorry Design Construction.</b> Schaefer. Medium 8vo	18s
<b>Motor Vehicles.</b> Fraser and Jones. Medium 8vo	16s
<b>Museum of Science and Art.</b> Lardner	21s
<b>Naval Architect's and Shipbuilder's Pocket-Book.</b> Mackrow and Woollard. Fcap. 8vo	16s
<b>Oils and Allied Substances.</b> Wright. Demy 8vo	<i>New Ed. Preparing</i>
<b>Oil-Field Development and Petroleum Mining.</b> Thompson	do.
<b>Oil Palm Cultivation.</b> Milligan. Small Crown 8vo	3s
<b>Ore Deposits of South Africa.</b> Johnson.	
<b>Part II.—The Witwatersrand and Pilgrimsrest Goldfields and Similar Occurrences.</b> Demy 8vo	
<b>Packing-Case Tables.</b> Richardson. Oblong 4to	5s
<b>Painting for the Imitation of Woods and Marbles.</b> Van der Burg. Royal Folio	<i>New Edition Nearly Ready</i>
<b>Paints : Their Chemistry and Technology.</b> Toch. Royal 8vo	30s
<b>Paper and its Uses.</b> Dawe. Crown 8vo	8s 6d
<b>Paper-Making.</b> Clapperton. Crown 8vo	7s 6d
<b>Paper-Making.</b> Watt. Crown 8vo	8s 6d
<b>Paper-Making, Chapters on.</b> Beadle. 5 vols. Crown 8vo. Per vol.	6s
<b>Pastrycook and Confectioner's Guide.</b> Wells. Crown 8vo	2s
<b>Patent-Rights.</b> Hardingham. Demy 8vo	<i>New Ed. Preparing</i>
<b>Pattern Making.</b> Barrows. Crown 8vo	14s
<b>Pattern Making.</b> Horner. Large Crown 8vo	9s
<b>Petrol Air Gas.</b> O'Connor. Crown 8vo	2s 6d
<b>Petroleum and its Substitutes, Chemistry of.</b> Tinkler and Chalenger. Medium 8vo	15s
<b>Petroleum, Oil Fields of Russia and the Russian Petroleum Industry.</b> Beeby Thompson. Royal 8vo	21s
<b>Pigments. An Artists' Manual.</b> Standage. Crown 8vo	3s
<b>Plumbing.</b> Blake. Crown 8vo	<i>In Preparation</i>
<b>Portland Cement Industry.</b> Brown. Medium 8vo	<i>New Ed. Preparing</i>
<b>Portland Cement, The Modern Manufacture of.</b> West. Royal 8vo.	
In 2 volumes.	
<b>Pot Plant Culture.</b> Davidson. Crown 8vo	5s
<b>Poultry Farming : Commercial.</b> Toovey. Crown 8vo	6s

*All Published Prices are net.*



**Producer Gas Practice (American) and Industrial Gas Engineering.**

Latta. Demy 4to . . . . .	30s
<b>Propagation and Pruning.</b> Newsham. Demy 8vo . . . . .	7s 6d
<b>Prospecting.</b> Merritt. Fcap. 8vo . . . . .	6s
<b>Prospecting for Gold.</b> Rankin. Fcap. 8vo . . . . .	7s 6d
<b>Prospector's Handbook.</b> Anderson. Small Crown 8vo . . . . .	5s
<b>Pumps and Pumping.</b> Bale. Crown 8vo . . . . .	5s
<b>Punches, Dies, and Tools.</b> Woodworth. Medium 8vo . . . . .	28s
<b>Radio and High-Frequency Currents.</b> Larnier. Crown 8vo <i>Nearly Ready</i>	
<b>Radiodynamics.</b> Miessner. Crown 8vo . . . . .	12s
<b>Radiotelegraphy, Elements of.</b> Stone. Crown 8vo . . . . .	16s 6d
<b>Rating and Assessment.</b> Webb. Demy 8vo . . . . .	15s
<b>Receipts, Formulas, and Processes.</b> Hiscox. Medium 8vo . . . . .	21s
<b>Recoil of Guns.</b> Rausenberger. Translated by Slater. Demy 8vo	12s 6d
<b>Refrigerating and Ice-Making Pocket-Book.</b> Wallis-Tayler. Cr. 8vo	5s
<b>Refrigeration, Cold Storage, and Ice-Making.</b> Wallis-Tayler. Med. 8vo	15s
<b>Reinforced Concrete Design Simplified.</b> Gammon & Dyson. Crown 4to	15s
<b>Road Construction and Maintenance.</b> Goldsmith. Medium 8vo . . . . .	21s
<b>Roads: The Making of Highroads.</b> Carey. Crown 8vo . . . . .	3s 6d
<b>Roof Carpentry.</b> Collings. Crown 8vo . . . . .	2s 6d
<b>Rothamsted Experiments.</b> Tipper. Crown 8vo . . . . .	4s
<b>Rubber: its Cultivation and Preparation.</b> Johnson. <i>New Ed. Preparing</i>	
<b>Rubber Hand Stamps.</b> Sloane. Square 8vo . . . . .	7s 6d
<b>Rubber Planter's Note-Book.</b> Braham. Fcap. 8vo . . . . .	5s
<b>Safe Railway Working.</b> Stretton. Crown 8vo . . . . .	4s 6d
<b>Safe Use of Steam.</b> By an Engineer . . . . .	6d
<b>Sailmaking.</b> Sadler. 4to . . . . .	12s 6d
<b>Sanitation, Water Supply, and Sewage Disposal of Country Houses.</b>	
Gerhard. Crown 8vo . . . . .	15s
<b>Savouries and Sweets.</b> Miss Allen. Fcap. 8vo . . . . .	1s 6d
<b>Saw Mills.</b> Bale. Crown 8vo . . . . .	10s 6d
<b>Screw Cutting for Engineers.</b> Pull. Crown 8vo . . . . .	2s 6d
<b>Screw Threads.</b> Hasluck. Waistcoat-pocket size . . . . .	2s
<b>Sea Terms, Phrases, and Words.</b> Pirrie. Fcap. 8vo . . . . .	7s 6d
<b>Sewage, Purification of.</b> Barwise. Demy 8vo . . . . .	12s 6d
<b>Sewerage Hydraulics.</b> Coleman. Demy 8vo . . . . .	<i>Nearly Ready</i>
<b>Sewerage of Sea Coast Towns.</b> Adams. Demy 8vo . . . . .	6s
<b>Sewerage Systems.</b> Watson and Herbert. Royal 8vo . . . . .	12s 6d
<b>Sheet Metal Worker's Instructor.</b> Warn and Horner. Crown 8vo	8s 6d
<b>Shipbuilding Industry of Germany.</b> Felskowski. Super Royal 4to	10s 6d
<b>Silver. The Metallurgy of.</b> Eissler. Crown 8vo . . . . .	12s 6d
<b>Slide Rule.</b> Hoare. Sm. Crown 8vo . . . . .	4s
<b>Smoley's Tables—1. Logarithms and Squares.</b> . . . . .	27s
2. Slopes and Rises . . . . .	24s
3. Logarithmic-Trigonometric Tables . . . . .	6s
<b>Soap: Modern Soap and Detergent Industry.</b> Martin. Royal 8vo	
Vol. 1 . . . . .	<i>Nearly Ready</i>
<b>Soap-Making.</b> Watt. Crown 8vo . . . . .	9s

*All Published Prices are net.*

<b>Soap-Making Manual.</b> Thomssen. 6" x 4½".	12s 6d
<b>Soaps, Candles, and Glycerine.</b> Lamborn. Medium 8vo	54s
<b>Solubilities of Inorganic and Organic Substances.</b> Seidell. Med. 8vo	45s
<b>Spanish Grammar and Reader.</b> Korth. Fcap. 8vo	2s 6d
<b>Specifications in Detail.</b> Macey and Allen. Royal 8vo	30s
<b>Specification, A Short.</b> Cubitt. Oblong Demy 4to	5s
<b>Specifications for Practical Architecture.</b> Bartholomew. Revised by Rogers. 8vo	16s
<b>Stanley, William Ford : His Life and Work.</b> Inwards. Demy 8vo	2s 6d
<b>Stationary Engines.</b> Hurst. Crown 8vo	2s
<b>Steam : The Application of Highly Superheated Steam to Locomotives.</b> Garbe. Edited by Robertson. Medium 8vo	9s
<b>Steam Engine.</b> Haeder and Powles. Crown 8vo	10s 6d
<b>Steam Engine.</b> Goodeve. Crown 8vo	6s 6d
<b>Steam Engine (Portable).</b> Wansbrough. Demy 8vo	6s
<b>Steam Engineering in Theory and Practice.</b> Hiscox and Harrison. Medium 8vo	21s
<b>Steel Research Committee's Report.</b> Fcap. Folio	31s 6d
<b>Steel Thermal Treatment.</b> Urquhart. Medium 8vo.	35s
<b>Steel : Elliott's Weights of Steel.</b> Medium 8vo	£5 5s
<b>Stockowner's Veterinary Aid.</b> Archer. Crown 8vo	7s 6d
<b>Stone Quarrying—Practical.</b> Greenwell and Elsdon. Med. 8vo	15s
<b>Stone Working Machinery.</b> Bale. Crown 8vo	10s 6d
<b>Strains, Handy Book for the Calculation of.</b> Humber. Crown 8vo	7s 6d
<b>Strains on Structures of Ironwork.</b> Shields. 8vo	5s
<b>Streamline Kite Balloons.</b> Sumner. Medium 8vo	10s 6d
<b>Structural Engineer's Pocket Book.</b> Andrews. Crown 8vo.	18s
<b>Submarine Telegraphs.</b> Bright. Super Royal 8vo	£3 3s
<b>Submarine Torpedo Boat.</b> Hoar. Crown 8vo	12s
<b>Superficial Measurement.</b> Hawkings. Crown 8vo.	4s
<b>Survey Practice.</b> Jackson. 8vo	12s 6d
<b>Surveying.</b> Whitelaw. Demy 8vo	12s 6d
<b>Surveying for Settlers.</b> Crosley. Small Crown 8vo	7s 6d
<b>Surveying Sheets for Professional and Educational Use.</b> Oblong Royal 8vo	1s 6d
<b>Surveying, Land and Marine.</b> Haskell. Large Crown 8vo	9s
<b>Surveying, Land and Mining.</b> Leston. Large Crown 8vo	9s
<b>Surveying, Practical.</b> Usill and Leston. Large Crown 8vo	8s 6d
<b>Surveying with the Tacheometer.</b> Kennedy. Demy 8vo	12s 6d
<b>Surveyor's Field Book for Engineers and Mining Surveyors.</b> Haskell. Crown 8vo	12s 6d
<b>Tanning Materials &amp; Extract Manufacture.</b> Harvey. Demy 8vo	15s
<b>Tanning (Practical).</b> Rogers and Flemming. Medium 8vo	45s
<b>Tannins (Synthetic).</b> Grasser and Enna. Demy 8vo	12s
<b>Tea Machinery and Tea Factories.</b> Wallis-Taylor. Medium 8vo	28s
<b>Technical Guide, Measurer, and Estimator.</b> Beaton. Waistcoat-pocket size	2s
<b>Technical Terms : English-French, French-English.</b> Fletcher. Waistcoat-pocket size	2s

<b>Technical Terms : English-German, German-English.</b> Horner and Holtzmann. Waistcoat-pocket size . . . . .	3s 6d
<b>Technical Terms : English-Spanish, Spanish-English.</b> Monteverde. Waistcoat-pocket size . . . . .	3s
<b>Telephones : their Construction, Installation, Wiring, Operation, and Maintenance.</b> Radcliffe and Cushing. Fcap. 8vo . . . . .	9s
<b>Telephones : Field Telephones and Telegraphs for Army Use.</b> Stevens. Crown 8vo . . . . .	3s
<b>Timber Merchant.</b> Richardson. Fcap. 8vo . . . . .	4s
<b>Timber Merchant's Companion.</b> Dowsing. Crown 8vo . . . . .	3s 6d
<b>Tools for Engineers and Woodworkers.</b> Horner. Demy 8vo . . . . .	10s 6d
<b>Toothed Gearing.</b> Horner. Crown 8vo . . . . . <i>New Ed. Preparing</i>	
<b>Traverse Tables.</b> Lintern. Small Crown 8vo . . . . .	3s 6d
<b>Tropical Agriculture.</b> Johnson. Demy 8vo . . . . .	5s
<b>Tunnelling.</b> Prelini and Hill. Royal 8vo . . . . .	18s
<b>Tunnelling, Practical.</b> Simms and Clark. Imp. 8vo . . . . .	21s
<b>Tunnel Shafts.</b> Buck. 8vo . . . . .	12s 6d
<b>Upholstering.</b> Bitmead. Crown 8vo . . . . .	2s 6d
<b>Urban Traffic, Principles of.</b> Stone. Crown 8vo . . . . .	3s 6d
<b>Valuation of Real Property.</b> Webb and Hunnings. Demy 8vo . . . . .	8s 6d
<b>Valuation of Real Property.</b> Lamputt. Crown 8vo . . . . .	2s 6d
<b>Valuation, Tabular Aids to.</b> M'Caw and Lyons. Crown 8vo . . . . .	5s
<b>Vegetable Culture.</b> Davidson. Crown 8vo . . . . .	4s 6d
<b>Wages Tables.</b> Garbutt. Square Crown 8vo . . . . .	6s
<b>Watchmaker's Handbook.</b> Saunier. Crown 8vo . . . . .	12s 6d
<b>Watch Repairing.</b> Garrard. Crown 8vo . . . . .	6s
<b>Water Engineering.</b> Slagg. Crown 8vo . . . . .	7s 6d
<b>Water, Flow of.</b> Schmeer. Medium 8vo . . . . .	18s
<b>Water Supplies.</b> Rideal. Demy 8vo . . . . .	8s 6d
<b>Water Supply of Cities and Towns.</b> Humber. Imp. 4to . . . . .	26 6s
<b>Water Supply (Rural).</b> Greenwell and Curry. Crown 8vo . . . . .	6s
<b>Water Supply of Towns and the Construction of Waterworks,</b> Burton. Super Royal 8vo . . . . .	28s
<b>Weight Calculator.</b> Harben. Royal 8vo . . . . .	25s
<b>Wire Ropes for Hoisting.</b> Crown 4to . . . . .	20s
<b>Wireless Telegraphy.</b> Erskine-Murray. Demy 8vo <i>New Ed. Preparing</i>	
<b>Wireless Telegraphy (Framework of).</b> Cadilhac. Demy 8vo . . . . .	4s 6d
<b>Wireless Telephones.</b> Erskine-Murray. Cr. 8vo <i>New Ed. Nearly Ready</i>	
<b>Wireless Telephony.</b> Ruhmer. Demy 8vo . . . . .	10s 6d
<b>Wood, The Seasoning of.</b> Wagner. Royal 8vo . . . . .	21s
<b>Wood-Carving for Amateurs.</b> By a Lady. Crown 8vo . . . . .	2s 6d
<b>Woodworking Machinery.</b> Bale. Large Crown 8vo . . . . .	10s 6d
<b>Woodworking Machinery for Small Workshops,</b> Ball. Cr. 8vo <i>In Preparation.</i>	
<b>Workshop Practice, Modern.</b> Pull. Large Crown 8vo . . . . .	16s
<b>Works' Manager's Handbook.</b> Hutton. Medium 8vo . . . . .	18s

*All Published Prices are net.*

# PRACTICAL HANDBOOKS FOR HOME STUDY.

Issued by THE AMERICAN TECHNICAL SOCIETY.

Agents: **CROSBY LOCKWOOD & SON.**

*NOTE.—The Prices herein quoted are based on American Prices and therefore subject to revision without notice.*

Air Brake. Ludy	7s 8d
Alternating-Current Machinery. Esty	15s
Architectural Drawing and Lettering. Bourne	7s 6d
Armature Winding. Moreton	10s
Automobile Construction and Repair. Hall	15s
Automobile Ignition, Starting and Lighting. Hayward	22s
Bank Bookkeeping. Sweetland	7s 6d
Blueprint Reading. Fairfield and Kenison	10s
Bridge Engineering—Roof Trusses. Dufour	15s
Building and Flying an Aeroplane. Hayward	5s
Building Code. Fitzpatrick	7s 6d
Building Superintendence. Nichols	10s
Building Superintendence for Reinforced Concrete Structures. Post	7s 6d
Building Superintendence for Steel Structures. Belden	7s 6d
Business English and Correspondence. Barrett	7s 6d
Carpentry. Townsend	7s 6d
Civil Engineering Specifications and Contracts. Ashbridge	10s
Commercial Law. Chamberlain	10s
Compressed Air. Wightman	7s 6d
Contracts and Specifications. Nichols	7s 6d
Corporation Accounts and Voucher System. Griffith	5s
Corporation Law. Abbott, Springer, and Gilmore	15s
Cotton Spinning. Hedrick	12s 6d
Dams and Weirs. Bligh	10s
Descriptive Astronomy. Moulton	10s
Electric Railways. Craveth	7s 6d
Electric Lighting. Harrison	10s
Electric and Gas Welding. Cravens	7s 6d
Electrochemistry and Metallurgy. Burgess	7s 6d
Electrochemistry and Welding. Burgess	10s
Elements of Electricity. Millikan	7s 6d
Elevators. Jallings	12s 6d
Estimating. Nichols	7s 6d
Fire Insurance Law. Hardy	10s
Fireproof Construction. Fitzpatrick	12s 6d
Ford Car. Bayston	10s
Forging. Jernberg	7s 6d
Foundry Work. Gray	10s
Freehand and Perspective Drawing. Everett	5s
Gas and Oil Engines and Gas Producers. Marks	12s 6d
Gasoline Automobile. Loughheed	7s 6d
Gasoline Tractors. Hayward	7s 6d
Getting a Good Job. Barrett	5s

*All Published Prices are net.*

# 14 *List of Books published by Crosby Lockwood and Son*

Heating and Ventilation. Hubbard . . . . .	10s
Hydraulic Engineering. Turneure and Black . . . . .	15s
Interior Electric Wiring. Nelson . . . . .	12s 6d
Locomotive Boilers and Engines. Ludy . . . . .	7s 6d
Machine Design. Wallace . . . . .	10s
Machine Drawing. Griffin and Adams . . . . .	10s
Machine-Shop Work. Turner and Perrigo . . . . .	12s 6d
Mechanical Drawing. Kenison . . . . .	5s
Meter Testing and Electrical Measurements. Bushnell and Turnbull . . . . .	7s 6d
Modern American Homes. Von Holst . . . . .	10s
Modern Land and Submarine Telegraphy. Macomber . . . . .	5s
Modern Radio Practice. Hayward . . . . .	10s
Modern Road Construction. Byne . . . . .	7s 6d
Orders of Architecture. Bourne, Brown and Holst . . . . .	15s
Oxy-Acetylene Welding Practice. Kell . . . . .	5s
Pattern Making. Ritchey and Monroe . . . . .	7s 6d
Plumbing. Gray and Ball . . . . .	7s 6d
Portfolio of the Orders. Bourne, Brown, and Holst . . . . .	10s
Power Stations and Transmissions. Shaad . . . . .	10s
Practical Aviation. Chas. B. Hayward . . . . .	15s
Practical Bookkeeping. Griffith . . . . .	7s 6d
Practical Mathematics. Nobbs and Waite . . . . .	7s 6d
Railroad Engineering. Webb . . . . .	15s
Real Property Law. Kales . . . . .	12s 6d
Refrigeration. Arrowood . . . . .	10s
Reinforced Concrete. Webb and Gibson . . . . .	10s
Sewers and Drains. Marston and Fleming . . . . .	7s 6d
Sheet Metal Work. Neubecker . . . . .	10s
Small Motors, Transformers and Electromagnets . . . . .	12s 6d
Stair Building and Steel Square. Hodgson . . . . .	5s
Standard Legal Forms. Lee . . . . .	10s
Steam Boilers, Care and Operation. Kuss . . . . .	7s 6d
Steam Boilers, Construction and Design. Kuss . . . . .	7s 6d
Steam Engines. Ludy . . . . .	10s
Steam Engine Indicators and Valve Gears. Ludy . . . . .	7s 6d
Steam Turbines. Leland . . . . .	7s 6d
Steel Construction. Burt . . . . .	12s 6d
Storage Batteries. Crocker and Arendt . . . . .	7s 6d
Strength of Materials. Maurer . . . . .	7s 6d
Structural Drafting. Dufour . . . . .	5s
Surveying. Finch . . . . .	10s
Switchboards. Adams . . . . .	7s 6d
Telephony. Miller and M'Meen . . . . .	£1 8s
Tool and Die Design for Beginners. Shailor . . . . .	7s 6d
Tool Making. Markham . . . . .	10s
Trigonometry, Plane. McCarty . . . . .	5s
Underwriters' Requirements or Safe Electrical Installations. Pierce . . . . .	7s 6d
Vocational Guidance. McKinney-Simons . . . . .	10s
Wireless : How to Become a Wireless Operator. Hayward . . . . .	10s

*All Published Prices are net.*

# A SELECTED LIST OF WEALE'S SCIENTIFIC AND TECHNICAL SERIES.

**Arranged according to Subjects. All these Prices are net.**

Acoustics, <i>Smith</i> (116) . . . . .	2/6	Decoration, Practical House, <i>Facey</i> (257) . . . . .	3/6
Agricultural Surveying, <i>Scott</i> (245) . . . . .	2/6	Drainage of Lands, <i>Dempsey</i> (268) . . . . .	4/6
Animal Physics, <i>Lardner</i> --		Draining & Embanking, <i>Scott</i> (239) . . . . .	2/-
Part I (183) . . . . .	4/6	Drawing and Measuring Instru-	
Part II (184) . . . . .	3/6	ments, <i>Heather</i> (168) . . . . .	3/-
Arches, Piers, &c., <i>Bland</i> (111) . . . . .	2/-	Dwelling Houses, <i>Brooks</i> (132) . . . . .	3/-
Architecture, Ancient (128, 130) . . . . .	6/-	Electric Lighting, <i>Swinton</i> (282) . . . . .	2/-
Design, <i>Garbett</i> (18) . . . . .	3/-	Farm Roads and Fences, <i>Scott</i>	
Grecian, <i>Aberdeen</i> (130) . . . . .	1/6	(241) . . . . .	2/6
of Vitruvius, <i>Gwilt</i> (128) . . . . .	5/-	Farming Economy, <i>Burn</i> (141) . . . . .	3/6
Orders, <i>Leeds</i> (16) . . . . .	2/6	Foundations, &c., <i>Dobson</i> (44) . . . . .	2/-
Orders and Styles (16, 17) . . . . .	5/-	French Polishing, <i>Butmead</i> (281) . . . . .	2/6
Styles, <i>Bury</i> (17) . . . . .	2/6	Fruit Trees, <i>Du Breuil</i> (177) . . . . .	4/6
Architectural Modelling, <i>Richardson</i>		Garden Receipts, <i>Quin</i> (233) . . . . .	2/-
(127) . . . . .	2/-	Gas Works, <i>Hughes &amp; O'Connor</i> (212) . . . . .	6/6
Arithmetic, <i>Young</i> (84) . . . . .	3/-	Geology, Historical, <i>Tate</i> (173) . . . . .	2/6
Do. do Key (84*) . . . . .	2/6	Physical, <i>Tate</i> (174) . . . . .	2/-
Equational, <i>Hipsley</i> (58) . . . . .	2/-	Geometry, Descriptive, <i>Heather</i> (76) . . . . .	2/6
Blasting and Quarrying, <i>Burgoyne</i>		Plane, <i>Heather</i> (178) . . . . .	2/-
(35) . . . . .	2/-	Grafting and Budding, <i>Ballet</i> (231) . . . . .	3/6
Boiler-makers' Assistant, <i>Courtney</i>		Hall Marking of Jewellery, <i>Gee</i> (249) . . . . .	3/6
(211) . . . . .	3/-	Hand-lifting and Staircasing, <i>Col-</i>	
Ready Reckoner, <i>Courtney</i> (254) . . . . .	6/-	lings, &c., . . . . .	3/6
Bookkeeping (83) . . . . .	1/6	Health, Management of, <i>Baird</i> (112*) . . . . .	1/6
for Farmers, <i>Woodman</i> (266) . . . . .	3/-	House Book (112, 112*, 194) . . . . .	6/-
Boot and Shoe Making, <i>Leno</i> (262) . . . . .	3/-	Decoration <i>Facey</i> (229, 257) . . . . .	6/-
Brass Founding, <i>Graham</i> (162) . . . . .	3/6	Manager (194) . . . . .	3/6
Brick-Cutting & Setting, <i>Hammond</i>		Human Understanding, <i>Locke</i> (153) . . . . .	2/-
(265) . . . . .	2/6	Irrigation and Water Supply, <i>Scott</i>	
Bricklaying, <i>Hammond</i> (189) . . . . .	2/6	(240) . . . . .	2/6
Brickwork, <i>Walker</i> (252) . . . . .	2/6	Joints Used by Builders, <i>Christy</i>	
Bridges (Iron), <i>Pendred</i> (260) . . . . .	2/6	(226) . . . . .	3/6
(Tubular and Girder), <i>Dempsey</i> (43) . . . . .	2/6	Kitchen Gardening, <i>Glenny</i> (201) . . . . .	3/-
Building, <i>Beckett</i> (206) . . . . .	5/6	Land, Ready Reckoner, <i>Arman</i> (61) . . . . .	3/-
Estates, <i>Maitland</i> (247) . . . . .	2/6	Landed Estates Management, <i>Burn</i>	
Science of, <i>Tarn</i> (267) . . . . .	4/-	(208) . . . . .	3/-
Calculus, Differential, <i>Woolhouse</i>		Light, <i>Tarn</i> (269) . . . . .	2/-
(101) . . . . .	2/-	Locomotive Engine Driving, <i>Rey-</i>	
Carpentry and Joinery, <i>Tredgold</i> ,		nolds (255) . . . . .	5/-
Plates, 4to (182*) . . . . .	7/6	Engineer, Model, <i>Reynolds</i> (278) . . . . .	5/-
Cattle, Sheep, & Horses, <i>Burn</i> (142) . . . . .	3/6	Logarithms, <i>Law</i> (204*) . . . . .	4/-
Cements, Pastes, Glues, <i>Standage</i> (276) . . . . .	3/6	Logic, <i>Emmens</i> (150) . . . . .	2/-
Circular Work in Carpentry, <i>Collings</i>		Machinery, Details of, <i>Campin</i> (236) . . . . .	3/6
(258) . . . . .	3/6	Marine Engineering Elementary,	
Coach-Building, <i>Burgess</i> (224) . . . . .	3/6	<i>Brewer</i> (275) . . . . .	3/-
Coal Mining, <i>Smyth</i> (180) . . . . .	4/-	Masonry and Stone-Cutting (25) . . . . .	3/-
Colouring, Grammar of, <i>Field</i> (186) . . . . .	3/6	Masting and Riggering, <i>Kipping</i> (54) . . . . .	3/-
Compound Interest and Annuities,		Materials & Construction, <i>Campin</i>	
<i>Thoman</i> (196) . . . . .	4/6	(216) . . . . .	3/6
Cottage Building, <i>Allen</i> (42) . . . . .	2/6	Mathematical Instruments, <i>Heather</i>	
Gardening, <i>Hobday</i> (232) . . . . .	2/-	(168-9-70) . . . . .	7/6
Dairy, Pigs and Poultry, <i>Burn</i> (145) . . . . .	2/6	Mathematical Tables, <i>Law and</i>	
Decoration, Elementary House,		<i>Young</i> (204) . . . . .	5/-
<i>Facey</i> (229) . . . . .	2/6		

*All Published Prices are net.*

## 16 List of Books published by Crosby Lockwood and Son

Mathematics, <i>Campin</i> (227) . . . . .	3 6	Quantities & Measurements, <i>Beaton</i> (156) . . . . .	2/-
Measures, Weights, and Moneys, <i>Woolhouse</i> (221) . . . . .	3/-	Roads and Streets, <i>Law, Clark, and Tayler</i> (197) . . . . .	6/6
Meat Production, <i>Ewart</i> (250) . . . . .	3/-	Sailmaking, <i>Kipping</i> (149) . . . . .	3/6
Mechanical Engineering, <i>Campin</i> (223) . . . . .	3/6	Sanitary Work, <i>Slaga</i> , (203) . . . . .	3/6
Medicine, Domestic, <i>Gooding</i> (112) . . . . .	2/-	Sewage, Irrigation, &c., <i>Burn</i> (146). . . . .	3/-
Mensuration and Measuring, <i>Baker</i> (93). . . . .	2/6	Sheet-Metal Workers' Guide, <i>Crane</i> (238) . . . . .	2/6
Mineral Surveyors' Guide, <i>Lintern</i> (195) . . . . .	4/-	Shoring, <i>Blagrove</i> (261) . . . . .	2/-
Mining Tools, <i>Morgans</i> (172) . . . . .	3/-	Silversmiths' Handbook, <i>Gee</i> (225) . . . . .	5/-
<i>Morgans</i> , Plates, 4to (172*) . . . . .	5/-	Slate and Slate Quarrying, <i>Davies</i> (214) . . . . .	3/6
Music, <i>Spencer</i> (69) . . . . .	2/6	Smithy and Forge, <i>Crane</i> (237). . . . .	3/6
Natural Philosophy, <i>Tomlinson</i> (2) . . . . .	2/-	Soils, Manures, and Crops, <i>Burn</i> (140) . . . . .	3/-
Navigation & Nautical Astronomy, <i>Young</i> (99) . . . . .	1s.	Stationary Engine Driving, <i>Reynolds</i> (256) . . . . .	5/-
<i>Greenwood and Rosser</i> (55) . . . . .	3/-	Steam Engine, <i>Lardner</i> (34) . . . . .	2/-
Optical Instruments, <i>Heather</i> (169) . . . . .	3/-	Surveying, <i>Baker and Dixon</i> (60) . . . . .	3/-
Organ Building, <i>Dickson</i> (235) . . . . .	3/6	Instruments, <i>Heather</i> (170) . . . . .	3/-
Painting, Fine Art, <i>Gullick and Timbs</i> (181) . . . . .	5/6	Subterraneous, <i>Fenwick</i> (117) . . . . .	3/-
Perspective, <i>Pyne</i> (20) . . . . .	2/6	Tree Planter and Propagator, <i>Wood</i> (209) . . . . .	3/-
Pianoforte, <i>Spencer</i> (71) . . . . .	1/6	Pruner, <i>Wood</i> (210) . . . . .	2/6
Pioneer Engineering, <i>Dobson</i> (213) . . . . .	5/-	Ventilation of Buildings, <i>Buchan</i> (271) . . . . .	4/-
Plastering, <i>Kemp</i> (273) . . . . .	3/-	Water, Power of, <i>Glynn</i> (82) . . . . .	2/-
Pneumatics, <i>Tomlinson</i> (12) . . . . .	2/-	Well Sinking, <i>Swindell &amp; Burnell</i> (31) . . . . .	3/6
Portland Cement, <i>Faia</i> (248) . . . . .	3/6		

## WEALE'S EDUCATIONAL SERIES.

English Grammar, <i>Clarke</i> (11) . . . . .	2/-	French Grammar, <i>Strauss</i> (24) . . . . .	2/-
Greek Grammar, <i>Hamilton</i> (14). . . . .	2/-	German Reader, <i>Strauss</i> (40) . . . . .	1/-
Lexicon, <i>Hamilton</i> —		Hebrew Dictionary, <i>Bresslau</i> —	
Greek and English (15) . . . . .	3/-	Hebrew and English (44) . . . . .	7/6
English and Greek (17) . . . . .	2/6	English and Hebrew (46) . . . . .	3/6
Complete in 1 vol. . . . .	6/-	Hebrew Grammar, <i>Bresslau</i> (46*) . . . . .	2/-
Latin Grammar, <i>Goodwin</i> (19) . . . . .	2/-	French and English Phrase Book (47). . . . .	1 6
Dictionary, <i>Goodwin</i> —		Composition and Punctuation, <i>Brennan</i> (48) . . . . .	2/-
Latin and English (20) . . . . .	2/6	Derivative English Spelling, <i>Rowbotham</i> (49) . . . . .	2/-
English and Latin (22) . . . . .	2/-	Extempore Speaking, <i>Burdett</i> (51) . . . . .	3/-
Complete in 1 vol. . . . .	5/-	Portuguese Grammar, <i>Lucas</i> (55) . . . . .	2/6
Italian Grammar, <i>Elwes</i> (27) . . . . .	2/-	Dictionary, <i>Elwes</i> (56) . . . . .	8/6
Triglot Dictionary, <i>Elwes</i> , English—		Cæsar's Commentaries on the Gallic War, <i>Young</i> . . . . .	2/6
French-Italian (30) . . . . .	3/-		
French-Italian-English (32) . . . . .	3/-		
Spanish Grammar, <i>Elwes</i> (34) . . . . .	2/6		
Dictionary, <i>Elwes</i> (35) . . . . .	8/6		

*All Published Prices are net.*

**LONDON: CROSBY LOCKWOOD & SON,**

**7 STATIONERS' HALL COURT, LUDGATE HILL, E.C.4.**

*Printed in Great Britain by UNWIN BROTHERS, LIMITED, LONDON AND WOKING.*











